AN INVESTIGATION OF FRICTION M. I. T. FOUR STROKE GEOMETRICALLY SIMILAR ENGINES

RICHARD ARONER
PETER J. F. O'REILLY

Thesis
A73

Library
U. S. Naval Postgraduate School
Monterey, California

m-74

Artisan Gold Lettering & Smith Bindery

593 - 15th Street Oakland, Calif. GLencourt 1-9827

DIRECTIONS FOR BINDING

BIND IN
(CIRCLE ONE)

BUCKRAM
COLOR NO. 8854

FABRIKOID
COLOR

LEATHER
COLOR

OTHER INSTRUCTIONS
Letter in gold.
Letter on the front cover:

shelf
LETTERING ON BACK TO BE EXACTLY AS PRINTED HERE.

ARONER
and
O'REILLY

1951

THESIS
A73

AN INVESTIGATION OF FRICTION
IN I. I. T. FOUR STROKE
GEOMETRICALLY SIMILAR ENGINES

RICHARD ARONER

PETER J. F. O'REILLY

M-74
885-4

AN INVESTIGATION OF FRICTION IN M. I. T. FOUR STROKE GEOMETRICALLY SIMILAR ENGINES

by

Richard Aroner Lt U.S.N.

Peter J.F. O'Reilly Lt (jg) U.S.N.

Submitted in Partial Fulfillment of the Requirements for the Degree of Naval Engineer from the Massachusetts Institute of Technology.

1951

Library
U. S. Naval Postgraduate School
Monterey, California

ABSTRACT

AN INVESTIGATION OF FRICTION IN M.I.T.

FOUR STROKE

GEOMETRICALLY SIMILAR ENGINES

Richard Aroner Lt. U.S.N.

Peter J.F. O'Reilly Lt (jg) U.S.N.

Submitted for the degree of Naval Engineer in the Department of Naval Architecture and Marine Engineering on May 18,1951.

Three Geometrically Similar Engines are installed in Sloan Laboratory for the purpose of investigating the effect of size on engine characteristics and performance.

A theory has been formulated, which states that in similar engines operating at the same piston speed, if the ratio of oil viscosity to bore (characteristic dimension) is the same for all engines, then IMEP, FMEP, BMEP, and indicated thermal efficiency will be the same.

Previous investigative work on the OS engines has resulted in poor correlation of FMEP firing and but slightly better correlation in FMEP in the motoring condition.

The purpose of this thesis was to motor the engines in several stages of assembly, to systematically determine the mechanical friction contribution of each engine part. These results were then compared for the three engines in an effort to determine the source of disagreement.

This work finds that within the limits of experimental accuracy the motoring FMEP and MMEP do conform to theory. The data collected on the smallest of the three engines is at variance with that previously obtained, and essentially resolves the past disagreement with OSE theory.

The presence of a contact type rubber oil seal may contribute as much as 20% of the total friction mean effective pressure motoring in the completely assembled condition.

It is recommended that more firing data be collected to check previous information on firing FMEP and that the contact type oil seals be replaced with non-contact seals.

15597

Library
U. S. Naval Postgraduate School
Monterey, California

ABSTRACT

AN INVESTIGATION OF FRICTION IN M.I.T.

FOUR STROKE

GEOMETRICALLY SIMILAR ENGINES

by

Robert Arpner Lt. U.S.N.

Peter J.E. O'Reilly Lt (jg) U.S.N.

Submitted for the degree of Naval Engineer in the Department of Naval Architecture and Marine Engineering on May 15,1951.

There Geometrically Similar Engines are installed in Sloan Laboratory for the purpose of investigating the effect of size on engine characteristics and performance.

A theory has been formulated, which states that in similar engines operating at the same piston speed, if the ratio of oil viscosity to bore (characteristic dimension) is the same for all engines, then IMEP, PMEP, BMEP, and indicated thermal efficiency will be the same.

Previous investigative work on the GE engines has resulted in poor correlation of PMEP friction and but slightly better correlation in PMEP in the motoring condition.

The purpose of this thesis was to motor the engines in several stages of assembly, to systematically determine the mechanical friction contribution of each engine part. These results were then compared for the three engines in an effort to determine the source of discrepancy.

This work finds that within the limits of experimental accuracy the motoring PMEP and IMEP do conform to theory. The data collected on the smallest of the three engines is at variance with that previously obtained, and essentially resolves the past discrepancy with GE theory.

The presence of a contact type rubber oil seal may contribute as much as 20% of the total friction mean effective pressure motoring in the completely assembled condition.

It is recommended that more fixing data be collected to check previous information on fixing PMEP and that the contact type oil seals be replaced with non-contact seals.

15541

May 18, 1951

Professor J. C. NEWELL
Secretary of the Faculty
Massachusetts Institute of Technology
Cambridge 39, Massachusetts

Dear Professor NEWELL:

In compliance with the requirements for the Degree of Naval Engineer from the Massachusetts Institute of Technology, we hereby submit a thesis entitled, 'An Investigation of Friction in M.I.T. Four Stroke Geometrically Similar Engines.'

A C K N O W L E D G E M E N T

The authors wish to acknowledge their indebtedness for the helpful advice and criticisms given by:

Professor G. F. Taylor

Professor W. A. Leary

Mr. J. O. Livengood

Mr. D. S. Doremus

Mr. W. Hall

TABLE OF CONTENTS

Page

Abstract
Introduction 5
Equipment 6
Procedure 7
Results 10
Discussion 11
Conclusions 14
Recommendations 15
Figures 16
Tables 26
Appendix 38
A. Details of O.S. Engines 39
B. Friction Theory for
Geometrically Similar Engines . .45
C. Lubricants 46
D. Water Flow Measurements 47
E. Measured Dimensions and
Piston Ring Data 51
F. Bibliography 53

LIST OF FIGURES

No.	Title
1.	2½" G.S. Engine, Motoring HEP Vs. Piston Speed for Various Water Flows.
2.	2½" G.S. Engine, Motoring HEP Vs. Piston Speed for Conditions "A", "B", "J".
3.	4" G.S. Engine, Motoring HEP Vs. Piston Speed for Conditions "A", "B", "J".
4.	6" G.S. Engine, Motoring HEP Vs. Piston Speed for Conditions "A", "B", "J".
5.	G.S. Engines, Motoring HEP Vs. Piston Speed "A" Condition - Complete Engine.
6.	G.S. Engines, Motoring HEP Vs. Piston Speed "B" Condition - Crankshaft, Rod, and Piston.
7.	G.S. Engines, Motoring HEP Vs. Piston Speed "J" Condition - Crankshaft and Idler.
8.	2½" Engine, Motoring HEP Vs. Piston Speed for Conditions "A" - Complete Engine "A'" - Same as "A" Except Shaft Oil Seal Removed.
9.	2½" G.S. Engine, Motoring HEP Vs. Piston Speed for Conditions "B" - Crankshaft, Rod, and Piston After Alteration. "B'" Crankshaft, Rod, and Piston Before Alteration.

APPENDIX FIGURES

A-1 Detail View of G.S. Engines and "A" Condition of Assembly.

A-2 Sketch of G.S. Engines showing "B" Condition of Assembly.

A-3 Sketch of G.S. Engines showing "J" Condition of Assembly.

A-4 Schematic Diagram, Similar Engines.

A-5 Schematic Diagram of Hydraulic Scale Installation.

B-1 2½" G.S. Engine Water Orifice Calibration Curve.

B-2 4" G.S. Engine Water Orifice Calibration Curve.

B-3 6" G.S. Engine Water Orifice Calibration Curve.

ملخص ٥

مقدمة ٦

الفصل الأول: الإطار النظري للدراسة ١٠

المبحث الأول: مفهوم الإدارة وتطورها ١٠

المبحث الثاني: الإدارة في الإسلام ١٤

المبحث الثالث: الإدارة في العصر الحديث ١٩

المبحث الرابع: الإدارة في المملكة العربية السعودية ٢٤

الفصل الثاني: الدراسة الميدانية ٣٠

المبحث الأول: منهجية الدراسة وإجراءاتها ٣٠

المبحث الثاني: تحليل البيانات واختبار الفرضيات ٣٥

الخاتمة والتوصيات ٤٠

المراجع ٤٤

LIST OF TABLES

I through V . . . . . Data Sheets for 2½" engine.

VI through VIII . . . . Data Sheets for 4" engine.

IX through XI . . . . . Data Sheets for 5" engine.

ABBREVIATIONS AND SYMBOLS

BMEP	Brake Mean Effective Pressure
δ	Bearing Clearance
D	Diameter
d'	Absolute Water Flow Manometer Scale Reading - Inches of Mercury
d	d' minus Scale Zero
F	Degrees Fahrenheit
FMEP	Friction Mean Effective Pressure
GSE	Geometrically Similar Engine
h'	Absolute Dynamometer Scale Reading - Inches of Mercury
h	h' minus Scale Zero
k	Dynamometer Scale Constant
λ	Characteristic Dimension
MEP	Mean Effective Pressure
MMEP	Mechanical Mean Effective Pressure
N	Engine Speed - Rev. per Minute
PMEP	Pumping Mean Effective Pressure
RPM	Rev. per Minute
S	Stroke - Ft.
s	Piston Speed - Ft. per Minute
T_1	Temperature of Cooling Water at Inlet - Mercury Thermometer
T_2	" " " " at Outlet - " "
T_4	" " Circulating Oil at Sump Discharge - Mercury Thermometer
T_5	" " Bearing Oil at Inlet
$T_{7'}$	" " Main Bearing, Uncorrected - Thermocouple
T_7	" " " " , Corrected - "
$T_{8'}$	" " Cylinder Wall, Uncorrected - "
T_8	" " " " , Corrected - "

0	Avant-propos
1	Introduction
2	Chapitre 1 : Les nouveaux outils pour innover à l'image de demain
3	1.1 Notre cahier des charges
4	1.2 Chapitre 2 : Les nouveaux outils pour innover à l'image de demain
5	1.3 Méthode de travail
6	1.4 Notre cahier des charges - Conclusion
7	1.5 Chapitre 3 : Les nouveaux outils pour innover à l'image de demain
8	1.6 Méthode de travail
9	1.7 Chapitre 4 : Les nouveaux outils pour innover à l'image de demain
10	1.8 Notre cahier des charges - Conclusion
11	1.9 Chapitre 5 : Les nouveaux outils pour innover à l'image de demain
12	1.10 Méthode de travail
13	1.11 Chapitre 6 : Les nouveaux outils pour innover à l'image de demain
14	1.12 Notre cahier des charges - Conclusion
15	1.13 Chapitre 7 : Les nouveaux outils pour innover à l'image de demain
16	1.14 Méthode de travail
17	1.15 Chapitre 8 : Les nouveaux outils pour innover à l'image de demain
18	1.16 Notre cahier des charges - Conclusion
19	1.17 Chapitre 9 : Les nouveaux outils pour innover à l'image de demain
20	1.18 Méthode de travail
21	1.19 Chapitre 10 : Les nouveaux outils pour innover à l'image de demain
22	1.20 Notre cahier des charges - Conclusion
23	1.21 Chapitre 11 : Les nouveaux outils pour innover à l'image de demain
24	1.22 Méthode de travail
25	1.23 Chapitre 12 : Les nouveaux outils pour innover à l'image de demain
26	1.24 Notre cahier des charges - Conclusion
27	1.25 Chapitre 13 : Les nouveaux outils pour innover à l'image de demain
28	1.26 Méthode de travail
29	1.27 Chapitre 14 : Les nouveaux outils pour innover à l'image de demain
30	1.28 Notre cahier des charges - Conclusion
31	1.29 Chapitre 15 : Les nouveaux outils pour innover à l'image de demain
32	1.30 Méthode de travail
33	1.31 Chapitre 16 : Les nouveaux outils pour innover à l'image de demain
34	1.32 Notre cahier des charges - Conclusion
35	1.33 Chapitre 17 : Les nouveaux outils pour innover à l'image de demain
36	1.34 Méthode de travail
37	1.35 Chapitre 18 : Les nouveaux outils pour innover à l'image de demain
38	1.36 Notre cahier des charges - Conclusion
39	1.37 Chapitre 19 : Les nouveaux outils pour innover à l'image de demain
40	1.38 Méthode de travail
41	1.39 Chapitre 20 : Les nouveaux outils pour innover à l'image de demain
42	1.40 Notre cahier des charges - Conclusion
43	1.41 Chapitre 21 : Les nouveaux outils pour innover à l'image de demain
44	1.42 Méthode de travail
45	1.43 Chapitre 22 : Les nouveaux outils pour innover à l'image de demain
46	1.44 Notre cahier des charges - Conclusion
47	1.45 Chapitre 23 : Les nouveaux outils pour innover à l'image de demain
48	1.46 Méthode de travail
49	1.47 Chapitre 24 : Les nouveaux outils pour innover à l'image de demain
50	1.48 Notre cahier des charges - Conclusion
51	1.49 Chapitre 25 : Les nouveaux outils pour innover à l'image de demain
52	1.50 Méthode de travail
53	1.51 Chapitre 26 : Les nouveaux outils pour innover à l'image de demain
54	1.52 Notre cahier des charges - Conclusion
55	1.53 Chapitre 27 : Les nouveaux outils pour innover à l'image de demain
56	1.54 Méthode de travail
57	1.55 Chapitre 28 : Les nouveaux outils pour innover à l'image de demain
58	1.56 Notre cahier des charges - Conclusion
59	1.57 Chapitre 29 : Les nouveaux outils pour innover à l'image de demain
60	1.58 Méthode de travail
61	1.59 Chapitre 30 : Les nouveaux outils pour innover à l'image de demain
62	1.60 Notre cahier des charges - Conclusion
63	1.61 Chapitre 31 : Les nouveaux outils pour innover à l'image de demain
64	1.62 Méthode de travail
65	1.63 Chapitre 32 : Les nouveaux outils pour innover à l'image de demain
66	1.64 Notre cahier des charges - Conclusion
67	1.65 Chapitre 33 : Les nouveaux outils pour innover à l'image de demain
68	1.66 Méthode de travail
69	1.67 Chapitre 34 : Les nouveaux outils pour innover à l'image de demain
70	1.68 Notre cahier des charges - Conclusion
71	1.69 Chapitre 35 : Les nouveaux outils pour innover à l'image de demain
72	1.70 Méthode de travail
73	1.71 Chapitre 36 : Les nouveaux outils pour innover à l'image de demain
74	1.72 Notre cahier des charges - Conclusion
75	1.73 Chapitre 37 : Les nouveaux outils pour innover à l'image de demain
76	1.74 Méthode de travail
77	1.75 Chapitre 38 : Les nouveaux outils pour innover à l'image de demain
78	1.76 Notre cahier des charges - Conclusion
79	1.77 Chapitre 39 : Les nouveaux outils pour innover à l'image de demain
80	1.78 Méthode de travail
81	1.79 Chapitre 40 : Les nouveaux outils pour innover à l'image de demain
82	1.80 Notre cahier des charges - Conclusion
83	1.81 Chapitre 41 : Les nouveaux outils pour innover à l'image de demain
84	1.82 Méthode de travail
85	1.83 Chapitre 42 : Les nouveaux outils pour innover à l'image de demain
86	1.84 Notre cahier des charges - Conclusion
87	1.85 Chapitre 43 : Les nouveaux outils pour innover à l'image de demain
88	1.86 Méthode de travail
89	1.87 Chapitre 44 : Les nouveaux outils pour innover à l'image de demain
90	1.88 Notre cahier des charges - Conclusion
91	1.89 Chapitre 45 : Les nouveaux outils pour innover à l'image de demain
92	1.90 Méthode de travail
93	1.91 Chapitre 46 : Les nouveaux outils pour innover à l'image de demain
94	1.92 Notre cahier des charges - Conclusion
95	1.93 Chapitre 47 : Les nouveaux outils pour innover à l'image de demain
96	1.94 Méthode de travail
97	1.95 Chapitre 48 : Les nouveaux outils pour innover à l'image de demain
98	1.96 Notre cahier des charges - Conclusion
99	1.97 Chapitre 49 : Les nouveaux outils pour innover à l'image de demain
100	1.98 Méthode de travail
101	1.99 Chapitre 50 : Les nouveaux outils pour innover à l'image de demain
102	1.100 Notre cahier des charges - Conclusion
103	1.101 Chapitre 51 : Les nouveaux outils pour innover à l'image de demain
104	1.102 Méthode de travail
105	1.103 Chapitre 52 : Les nouveaux outils pour innover à l'image de demain
106	1.104 Notre cahier des charges - Conclusion
107	1.105 Chapitre 53 : Les nouveaux outils pour innover à l'image de demain
108	1.106 Méthode de travail
109	1.107 Chapitre 54 : Les nouveaux outils pour innover à l'image de demain
110	1.108 Notre cahier des charges - Conclusion
111	1.109 Chapitre 55 : Les nouveaux outils pour innover à l'image de demain
112	1.110 Méthode de travail
113	1.111 Chapitre 56 : Les nouveaux outils pour innover à l'image de demain
114	1.112 Notre cahier des charges - Conclusion
115	1.113 Chapitre 57 : Les nouveaux outils pour innover à l'image de demain
116	1.114 Méthode de travail
117	1.115 Chapitre 58 : Les nouveaux outils pour innover à l'image de demain
118	1.116 Notre cahier des charges - Conclusion
119	1.117 Chapitre 59 : Les nouveaux outils pour innover à l'image de demain
120	1.118 Méthode de travail
121	1.119 Chapitre 60 : Les nouveaux outils pour innover à l'image de demain
122	1.120 Notre cahier des charges - Conclusion
123	1.121 Chapitre 61 : Les nouveaux outils pour innover à l'image de demain
124	1.122 Méthode de travail
125	1.123 Chapitre 62 : Les nouveaux outils pour innover à l'image de demain
126	1.124 Notre cahier des charges - Conclusion
127	1.125 Chapitre 63 : Les nouveaux outils pour innover à l'image de demain
128	1.126 Méthode de travail
129	1.127 Chapitre 64 : Les nouveaux outils pour innover à l'image de demain
130	1.128 Notre cahier des charges - Conclusion
131	1.129 Chapitre 65 : Les nouveaux outils pour innover à l'image de demain
132	1.130 Méthode de travail
133	1.131 Chapitre 66 : Les nouveaux outils pour innover à l'image de demain
134	1.132 Notre cahier des charges - Conclusion
135	1.133 Chapitre 67 : Les nouveaux outils pour innover à l'image de demain
136	1.134 Méthode de travail
137	1.135 Chapitre 68 : Les nouveaux outils pour innover à l'image de demain
138	1.136 Notre cahier des charges - Conclusion
139	1.137 Chapitre 69 : Les nouveaux outils pour innover à l'image de demain
140	1.138 Méthode de travail
141	1.139 Chapitre 70 : Les nouveaux outils pour innover à l'image de demain
142	1.140 Notre cahier des charges - Conclusion
143	1.141 Chapitre 71 : Les nouveaux outils pour innover à l'image de demain
144	1.142 Méthode de travail
145	1.143 Chapitre 72 : Les nouveaux outils pour innover à l'image de demain
146	1.144 Notre cahier des charges - Conclusion
147	1.145 Chapitre 73 : Les nouveaux outils pour innover à l'image de demain
148	1.146 Méthode de travail
149	1.147 Chapitre 74 : Les nouveaux outils pour innover à l'image de demain
150	1.148 Notre cahier des charges - Conclusion
151	1.149 Chapitre 75 : Les nouveaux outils pour innover à l'image de demain
152	1.150 Méthode de travail
153	1.151 Chapitre 76 : Les nouveaux outils pour innover à l'image de demain
154	1.152 Notre cahier des charges - Conclusion
155	1.153 Chapitre 77 : Les nouveaux outils pour innover à l'image de demain
156	1.154 Méthode de travail
157	1.155 Chapitre 78 : Les nouveaux outils pour innover à l'image de demain
158	1.156 Notre cahier des charges - Conclusion
159	1.157 Chapitre 79 : Les nouveaux outils pour innover à l'image de demain
160	1.158 Méthode de travail
161	1.159 Chapitre 80 : Les nouveaux outils pour innover à l'image de demain
162	1.160 Notre cahier des charges - Conclusion
163	1.161 Chapitre 81 : Les nouveaux outils pour innover à l'image de demain
164	1.162 Méthode de travail
165	1.163 Chapitre 82 : Les nouveaux outils pour innover à l'image de demain
166	1.164 Notre cahier des charges - Conclusion
167	1.165 Chapitre 83 : Les nouveaux outils pour innover à l'image de demain
168	1.166 Méthode de travail
169	1.167 Chapitre 84 : Les nouveaux outils pour innover à l'image de demain
170	1.168 Notre cahier des charges - Conclusion
171	1.169 Chapitre 85 : Les nouveaux outils pour innover à l'image de demain
172	1.170 Méthode de travail
173	1.171 Chapitre 86 : Les nouveaux outils pour innover à l'image de demain
174	1.172 Notre cahier des charges - Conclusion
175	1.173 Chapitre 87 : Les nouveaux outils pour innover à l'image de demain
176	1.174 Méthode de travail
177	1.175 Chapitre 88 : Les nouveaux outils pour innover à l'image de demain
178	1.176 Notre cahier des charges - Conclusion
179	1.177 Chapitre 89 : Les nouveaux outils pour innover à l'image de demain
180	1.178 Méthode de travail
181	1.179 Chapitre 90 : Les nouveaux outils pour innover à l'image de demain
182	1.180 Notre cahier des charges - Conclusion
183	1.181 Chapitre 91 : Les nouveaux outils pour innover à l'image de demain
184	1.182 Méthode de travail
185	1.183 Chapitre 92 : Les nouveaux outils pour innover à l'image de demain
186	1.184 Notre cahier des charges - Conclusion
187	1.185 Chapitre 93 : Les nouveaux outils pour innover à l'image de demain
188	1.186 Méthode de travail
189	1.187 Chapitre 94 : Les nouveaux outils pour innover à l'image de demain
190	1.188 Notre cahier des charges - Conclusion
191	1.189 Chapitre 95 : Les nouveaux outils pour innover à l'image de demain
192	1.190 Méthode de travail
193	1.191 Chapitre 96 : Les nouveaux outils pour innover à l'image de demain
194	1.192 Notre cahier des charges - Conclusion
195	1.193 Chapitre 97 : Les nouveaux outils pour innover à l'image de demain
196	1.194 Méthode de travail
197	1.195 Chapitre 98 : Les nouveaux outils pour innover à l'image de demain
198	1.196 Notre cahier des charges - Conclusion
199	1.197 Chapitre 99 : Les nouveaux outils pour innover à l'image de demain
200	1.198 Méthode de travail
201	1.199 Chapitre 100 : Les nouveaux outils pour innover à l'image de demain
202	1.200 Notre cahier des charges - Conclusion
203	1.201 Chapitre 101 : Les nouveaux outils pour innover à l'image de demain
204	1.202 Méthode de travail
205	1.203 Chapitre 102 : Les nouveaux outils pour innover à l'image de demain
206	1.204 Notre cahier des charges - Conclusion
207	1.205 Chapitre 103 : Les nouveaux outils pour innover à l'image de demain
208	1.206 Méthode de travail
209	1.207 Chapitre 104 : Les nouveaux outils pour innover à l'image de demain
210	1.208 Notre cahier des charges - Conclusion
211	1.209 Chapitre 105 : Les nouveaux outils pour innover à l'image de demain
212	1.210 Méthode de travail
213	1.211 Chapitre 106 : Les nouveaux outils pour innover à l'image de demain
214	1.212 Notre cahier des charges - Conclusion
215	1.213 Chapitre 107 : Les nouveaux outils pour innover à l'image de demain
216	1.214 Méthode de travail
217	1.215 Chapitre 108 : Les nouveaux outils pour innover à l'image de demain
218	1.216 Notre cahier des charges - Conclusion
219	1.217 Chapitre 109 : Les nouveaux outils pour innover à l'image de demain
220	1.218 Méthode de travail
221	1.219 Chapitre 110 : Les nouveaux outils pour innover à l'image de demain
222	1.220 Notre cahier des charges - Conclusion
223	1.221 Chapitre 111 : Les nouveaux outils pour innover à l'image de demain
224	1.222 Méthode de travail
225	1.223 Chapitre 112 : Les nouveaux outils pour innover à l'image de demain
226	1.224 Notre cahier des charges - Conclusion
227	1.225 Chapitre 113 : Les nouveaux outils pour innover à l'image de demain
228	1.226 Méthode de travail
229	1.227 Chapitre 114 : Les nouveaux outils pour innover à l'image de demain
230	1.228 Notre cahier des charges - Conclusion
231	1.229 Chapitre 115 : Les nouveaux outils pour innover à l'image de demain
232	1.230 Méthode de travail
233	1.231 Chapitre 116 : Les nouveaux outils pour innover à l'image de demain
234	1.232 Notre cahier des charges - Conclusion
235	1.233 Chapitre 117 : Les nouveaux outils pour innover à l'image de demain
236	1.234 Méthode de travail
237	1.235 Chapitre 118 : Les nouveaux outils pour innover à l'image de demain
238	1.236 Notre cahier des charges - Conclusion
239	1.237 Chapitre 119 : Les nouveaux outils pour innover à l'image de demain
240	1.238 Méthode de travail
241	1.239 Chapitre 120 : Les nouveaux outils pour innover à l'image de demain
242	1.240 Notre cahier des charges - Conclusion
243	1.241 Chapitre 121 : Les nouveaux outils pour innover à l'image de demain
244	1.242 Méthode de travail
245	1.243 Chapitre 122 : Les nouveaux outils pour innover à l'image de demain
246	1.244 Notre cahier des charges - Conclusion
247	1.245 Chapitre 123 : Les nouveaux outils pour innover à l'image de demain
248	1.246 Méthode de travail
249	1.247 Chapitre 124 : Les nouveaux outils pour innover à l'image de demain
250	1.248 Notre cahier des charges - Conclusion
251	1.249 Chapitre 125 : Les nouveaux outils pour innover à l'image de demain
252	1.250 Méthode de travail
253	1.251 Chapitre 126 : Les nouveaux outils pour innover à l'image de demain
254	1.252 Notre cahier des charges - Conclusion
255	1.253 Chapitre 127 : Les nouveaux outils pour innover à l'image de demain
256	1.254 Méthode de travail
257	1.255 Chapitre 128 : Les nouveaux outils pour innover à l'image de demain
258	1.256 Notre cahier des charges - Conclusion
259	1.257 Chapitre 129 : Les nouveaux outils pour innover à l'image de demain
260	1.258 Méthode de travail
261	1.259 Chapitre 130 : Les nouveaux outils pour innover à l'image de demain
262	1.260 Notre cahier des charges - Conclusion
263	1.261 Chapitre 131 : Les nouveaux outils pour innover à l'image de demain
264	1.262 Méthode de travail
265	1.263 Chapitre 132 : Les nouveaux outils pour innover à l'image de demain
266	1.264 Notre cahier des charges - Conclusion
267	1.265 Chapitre 133 : Les nouveaux outils pour innover à l'image de demain
268	1.266 Méthode de travail
269	1.267 Chapitre 134 : Les nouveaux outils pour innover à l'image de demain
270	1.268 Notre cahier des charges - Conclusion
271	1.269 Chapitre 135 : Les nouveaux outils pour innover à l'image de demain
272	1.270 Méthode de travail
273	1.271 Chapitre 136 : Les nouveaux outils pour innover à l'image de demain
274	1.272 Notre cahier des charges - Conclusion
275	1.273 Chapitre 137 : Les nouveaux outils pour innover à l'image de demain
276	1.274 Méthode de travail
277	1.275 Chapitre 138 : Les nouveaux outils pour innover à l'image de demain
278	1.276 Notre cahier des charges - Conclusion
279	1.277 Chapitre 139 : Les nouveaux outils pour innover à l'image de demain
280	1.278 Méthode de travail
281	1.279 Chapitre 140 : Les nouveaux outils pour innover à l'image de demain
282	1.280 Notre cahier des charges - Conclusion
283	1.281 Chapitre 141 : Les nouveaux outils pour innover à l'image de demain
284	1.282 Méthode de travail
285	1.283 Chapitre 142 : Les nouveaux outils pour innover à l'image de demain
286	1.284 Notre cahier des charges - Conclusion
287	1.285 Chapitre 143 : Les nouveaux outils pour innover à l'image de demain
288	1.286 Méthode de travail
289	1.287 Chapitre 144 : Les nouveaux outils pour innover à l'image de demain
290	1.288 Notre cahier des charges - Conclusion
291	1.289 Chapitre 145 : Les nouveaux outils pour innover à l'image de demain
292	1.290 Méthode de travail
293	1.291 Chapitre 146 : Les nouveaux outils pour innover à l'image de demain
294	1.292 Notre cahier des charges - Conclusion
295	1.293 Chapitre 147 : Les nouveaux outils pour innover à l'image de demain
296	1.294 Méthode de travail
297	1.295 Chapitre 148 : Les nouveaux outils pour innover à l'image de demain
298	1.296 Notre cahier des charges - Conclusion
299	1.297 Chapitre 149 : Les nouveaux outils pour innover à l'image de demain
300	1.298 Méthode de travail
301	1.299 Chapitre 150 : Les nouveaux outils pour innover à l'image de demain
302	1.300 Notre cahier des charges - Conclusion
303	1.301 Chapitre 151 : Les nouveaux outils pour innover à l'image de demain
304	1.302 Méthode de travail
305	1.303 Chapitre 152 : Les nouveaux outils pour innover à l'image de demain
306	1.304 Notre cahier des charges - Conclusion
307	1.305 Chapitre 153 : Les nouveaux outils pour innover à l'image de demain
308	1.306 Méthode de travail
309	1.307 Chapitre 154 : Les nouveaux outils pour innover à l'image de demain
310	1.308 Notre cahier des charges - Conclusion
311	1.309 Chapitre 155 : Les nouveaux outils pour innover à l'image de demain
312	1.310 Méthode de travail
313	1.311 Chapitre 156 : Les nouveaux outils pour innover à l'image de demain
314	1.312 Notre cahier des charges - Conclusion
315	1.313 Chapitre 157 : Les nouveaux outils pour innover à l'image de demain
316	1.314 Méthode de travail
317	1.315 Chapitre 158 : Les nouveaux outils pour innover à l'image de demain
318	1.316 Notre cahier des charges - Conclusion
319	1.317 Chapitre 159 : Les nouveaux outils pour innover à l'image de demain
320	1.318 Méthode de travail
321	1.319 Chapitre 160 : Les nouveaux outils pour innover à l'image de demain
322	1.320 Notre cahier des charges - Conclusion
323	1.321 Chapitre 161 : Les nouveaux outils pour innover à l'image de demain
324	1.322 Méthode de travail
325	1.323 Chapitre 162 : Les nouveaux outils pour innover à l'image de demain
326	1.324 Notre cahier des charges - Conclusion
327	1.325 Chapitre 163 : Les nouveaux outils pour innover à l'image de demain
328	1.326 Méthode de travail
329	1.327 Chapitre 164 : Les nouveaux outils pour innover à l'image de demain
330	1.328 Notre cahier des charges - Conclusion
331	1.329 Chapitre 165 : Les nouveaux outils pour innover à l'image de demain
332	1.330 Méthode de travail
333	1.331 Chapitre 166 : Les nouveaux outils pour innover à l'image de demain
334	1.332 Notre cahier des charges - Conclusion
335	1.333 Chapitre 167 : Les nouveaux outils pour innover à l'image de demain
336	1.334 Méthode de travail
337	1.335 Chapitre 168 : Les nouveaux outils pour innover à l'image de demain
338	1.336 Notre cahier des charges - Conclusion
339	1.337 Chapitre 169 : Les nouveaux outils pour innover à l'image de demain
340	1.338 Méthode de travail
341	1.339 Chapitre 170 : Les nouveaux outils pour innover à l'image de demain
342	1.340 Notre cahier des charges - Conclusion
343	1.341 Chapitre 171 : Les nouveaux outils pour innover à l'image de demain
344	1.342 Méthode de travail
345	1.343 Chapitre 172 : Les nouveaux outils pour innover à l'image de demain
346	1.344 Notre cahier des charges - Conclusion
347	1.345 Chapitre 173 : Les nouveaux outils pour innover à l'image de demain
348	1.346 Méthode de travail
349	1.347 Chapitre 174 : Les nouveaux outils pour innover à l'image de demain
350	1.348 Notre cahier des charges - Conclusion
351	1.349 Chapitre 175 : Les nouveaux outils pour innover à l'image de demain
352	1.350 Méthode de travail
353	1.351 Chapitre 176 : Les nouveaux outils pour innover à l'image de demain
354	1.352 Notre cahier des charges - Conclusion
355	1.353 Chapitre 177 : Les nouveaux outils pour innover à l'image de demain
356	1.354 Méthode de travail
357	1.355 Chapitre 178 : Les nouveaux outils pour innover à l'image de demain
358	1.356 Notre cahier des charges - Conclusion
359	1.357 Chapitre 179 : Les nouveaux outils pour innover à l'image de demain
360	1.358 Méthode de travail
361	1.359 Chapitre 180 : Les nouveaux outils pour innover à l'image de demain
362	1.360 Notre cahier des charges - Conclusion
363	1.361 Chapitre 181 : Les nouveaux outils pour innover à l'image de demain
364	1.362 Méthode de travail
365	1.363 Chapitre 182 : Les nouveaux outils pour innover à l'image de demain
366	1.364 Notre cahier des charges - Conclusion
367	1.365 Chapitre 183 : Les nouveaux outils pour innover à l'image de demain
368	1.366 Méthode de travail
369	1.367 Chapitre 184 : Les nouveaux outils pour innover à l'image de demain
370	1.368 Notre cahier des charges - Conclusion
371	1.369 Chapitre 185 : Les nouveaux outils pour innover à l'image de demain
372	1.370 Méthode de travail
373	1.371 Chapitre 186 : Les nouveaux outils pour innover à l'image de demain
374	1.372 Notre cahier des charges - Conclusion
375	1.373 Chapitre 187 : Les nouveaux outils pour innover à l'image de demain
376	1.374 Méthode de travail
377	1.375 Chapitre 188 : Les nouveaux outils pour innover à l'image de demain
378	1.376 Notre cahier des charges - Conclusion
379	1.377 Chapitre 189 : Les nouveaux outils pour innover à l'image de demain
380	1.378 Méthode de travail
381	1.379 Chapitre 190 : Les nouveaux outils pour innover à l'image de demain
382	1.380 Notre cahier des charges - Conclusion
383	1.381 Chapitre 191 : Les nouveaux outils pour innover à l'image de demain
384	1.382 Méthode de travail
385	1.383 Chapitre 192 : Les nouveaux outils pour innover à l'image de demain
386	1.384 Notre cahier des charges - Conclusion
387	1.385 Chapitre 193 : Les nouveaux outils pour innover à l'image de demain
388	1.386 Méthode de travail
389	1.387 Chapitre 194 : Les nouveaux outils pour innover à l'image de demain
390	1.388 Notre cahier des charges - Conclusion
391	1.389 Chapitre 195 : Les nouveaux outils pour innover à l'image de demain
392	1.390 Méthode de travail
393	1.391 Chapitre 196 : Les nouveaux outils pour innover à l'image de demain
394	1.392 Notre cahier des charges - Conclusion
395	1.393 Chapitre 197 : Les nouveaux outils pour innover à l'image de demain
396	1.394 Méthode de travail
397	1.395 Chapitre 198 : Les nouveaux outils pour innover à l'image de demain
398	1.396 Notre cahier des charges - Conclusion
399	1.397 Chapitre 199 : Les nouveaux outils pour innover à l'image de demain
400	1.398 Méthode de travail
401	1.399 Chapitre 200 : Les nouveaux outils pour innover à l'image de demain
402	1.400 Notre cahier des charges - Conclusion
403	1.401 Chapitre 201 : Les nouveaux outils pour innover à l'image de demain
404	1.402 Méthode de travail
405	1.403 Chapitre 202 : Les nouveaux outils pour innover à l'image de demain
406	1.404 Notre cahier des charges - Conclusion
407	1.405 Chapitre 203 : Les nouveaux outils pour innover à l'image de demain
408	1.406 Méthode de travail
409	1.407 Chapitre 204 : Les nouveaux outils pour innover à l'image de demain
410	1.408 Notre cahier des charges - Conclusion
411	1.409 Chapitre 205 : Les nouveaux outils pour innover à l'image de demain
412	1.410 Méthode de travail
413	1.411 Chapitre 206 : Les nouveaux outils pour innover à l'image de demain
414	1.412 Notre cahier des charges - Conclusion
415	1.413 Chapitre 207 : Les nouveaux outils pour innover à l'image de demain
416	1.414 Méthode de travail
417	1.415 Chapitre 208 : Les nouveaux outils pour innover à l'image de demain
418	1.416 Notre cahier des charges - Conclusion
419	1.417 Chapitre 209 : Les nouveaux outils pour innover à l'image de demain
420	1.418 Méthode de travail
421	1.419 Chapitre 210 : Les nouveaux outils pour innover à l'image de demain
422	1.420 Notre cahier des charges - Conclusion
423	1.421 Chapitre 211 : Les nouveaux outils pour innover à l'image de demain
424	1.422 Méthode de travail
425	1.423 Chapitre 212 : Les nouveaux outils pour innover à l'image de demain
426	1.424 Notre cahier des charges - Conclusion
427	1.425 Chapitre 213 : Les nouveaux outils pour innover à l'image de demain
428	1.426 Méthode de travail
429	1.427 Chapitre 214 : Les nouveaux outils pour innover à l'image de demain
430	1.428 Notre cahier des charges - Conclusion
431	1.429 Chapitre 215 : Les nouveaux outils pour innover à l'image de demain
432	1.430 Méthode de travail
433	1.431 Chapitre 216 : Les nouveaux outils pour innover à l'image de demain
434	1.432 Notre cahier des charges - Conclusion
435	1.433 Chapitre 217 : Les nouveaux outils pour innover à l'image de demain
436	1.434 Méthode de travail
437	1.435 Chapitre 218 : Les nouveaux outils pour innover à l'image de demain
438	1.436 Notre cahier des charges - Conclusion
439	1.437 Chapitre 219 : Les nouveaux outils pour innover à l'image de demain
440	1.438 Méthode de travail
441	1.439 Chapitre 220 : Les nouveaux outils pour innover à l'image de demain
442	1.440 Notre cahier des charges - Conclusion
443	1.441 Chapitre 221 : Les nouveaux outils pour innover à l'image de demain
444	1.442 Méthode de travail
445	1.443 Chapitre 222 : Les nouveaux outils pour innover à l'image de demain
446	1.444 Notre cahier des charges - Conclusion
447	1.445 Chapitre 223 : Les nouveaux outils pour innover à l'image de demain
448	1.446 Méthode de travail
449	1.447 Chapitre 224 : Les nouveaux outils pour innover à l'image de demain
450	1.448 Notre cahier des charges - Conclusion
451	1.449 Chapitre 225 : Les nouveaux outils pour innover à l'image de demain
452	1.450 Méthode de travail
453	1.451 Chapitre 226 : Les nouveaux outils pour innover à l'image de demain
454	1.452 Notre cahier des charges - Conclusion
455	1.453 Chapitre 227 : Les nouveaux outils pour innover à l'image de demain
456	1.454 Méthode de travail
457	1.455 Chapitre 228 : Les nouveaux outils pour innover à l'image de demain
458	1.456 Notre cahier des charges - Conclusion
459	1.457 Chapitre 229 : Les nouveaux outils pour innover à l'image de demain
460	1.458 Méthode de travail
461	1.459 Chapitre 230 : Les nouveaux outils pour innover à l'image de demain
462	1.460 Notre cahier des charges - Conclusion
463	1.461 Chapitre 231 : Les nouveaux outils pour innover à l'image de demain
464	1.462 Méthode de travail
465	1.463 Chapitre 232 : Les nouveaux outils pour innover à l'image de demain
466	1.464 Notre cahier des charges - Conclusion
467	1.465 Chapitre 233 : Les nouveaux outils pour innover à l'image de demain
468	1.466 Méthode de travail
469	1.467 Chapitre 234 : Les nouveaux outils pour innover à l'image de demain
470	1.468 Notre cahier des charges - Conclusion
471	1.469 Chapitre 235 : Les nouveaux outils pour innover à l'image de demain
472	1.470 Méthode de travail
473	1.471 Chapitre 236 : Les nouveaux outils pour innover à l'image de demain
474	1.472 Notre cahier des charges - Conclusion
475	1.473 Chapitre 237 : Les nouveaux outils pour innover à l'image de demain
476	1.474 Méthode de travail
477	1.475 Chapitre 238 : Les nouveaux outils pour innover à l'image de demain
478	1.476 Notre cahier des charges - Conclusion
479	1.477 Chapitre 239 : Les nouveaux outils pour innover à l'image de demain
480	1.478 Méthode de travail
481	1.479 Chapitre 240 : Les nouveaux outils pour innover à l'image de demain
482	1.480 Notre cahier des charges - Conclusion
483	1.481 Chapitre 241 : Les nouveaux outils pour innover à l'image de demain
484	1.482 Méthode de travail
485	1.483 Chapitre 242 : Les nouveaux outils pour innover à l'image de demain
486	1.484 Notre cahier des charges - Conclusion
487	1.485 Chapitre 243 : Les nouveaux outils pour innover à l'image de demain
488	1.486 Méthode de travail
489	1.487 Chapitre 244 : Les nouveaux outils pour innover à l'image de demain
490	1.488 Notre cahier des charges - Conclusion
491	1.489 Chapitre 245 : Les nouveaux outils pour innover à l'image de demain
492	1.490 Méthode de travail
493	1.491 Chapitre 246 : Les nouveaux outils pour innover à l'image de demain
494	1.492 Notre cahier des charges - Conclusion
495	1.493 Chapitre 247 : Les nouveaux outils pour innover à l'image de demain
496	1.494 Méthode de travail
497	1.495 Chapitre 248 : Les nouveaux outils pour innover à l'image de demain
498	1.496 Notre cahier des charges - Conclusion
499	1.497 Chapitre 249 : Les nouve

ABBREVIATIONS AND SYMBOLS cont'd

μ	Absolute Viscosity
V	Displacement Volume
A	Complete Engine - No Inlet or Exhaust Pipes
A^e	Complete 2½" Engine - Shaft Oil Seal Removed
B	Crankshaft, Rod, and Piston
B'	Crankshaft, Rod, and Piston - Before Alterations 2½" Engine
C	Crankshaft and Idler.

Vve. Imprimerie Classique

Stéréotypeur Diplômé

Imprimerie Artistique — Ouvrages de Commerce (Usine)

Imprimerie de Journaux — Travaux de Ville Soignés

Imprimeurs, Ltée, Ateliers Typos

Imprimeurs, Ltée, Ateliers — Imprimerie Universitaire de Langue

Imprimeurs-Lithographes Réunis,

INTRODUCTION

Three geometrically similar internal combustion engines, designed and constructed under the supervision of the Automotive Division of the Mechanical Engineering Dep't of the Massachusetts Institute of Technology were installed in Sloan Laboratory during 1947. These engines were built primarily for laboratory investigation of theoretical similitude relations concerning piston engines. The establishment of a general geometrically similar engine theory offers attractive possibilities in developing a basis for rational engine design, as contrasted to wholly empirical engine design. It would also permit of wider application of use of model or small scale engines in determining characteristics of large machines.

SAE Theory states that in G.S. engines operating at the same piston speed, IMEP, FMEP and BMEP must be the same for all engines, if the ratio of absolute oil viscosity to a characteristic dimension is the same for all engines (3).

The only previous work which has been accomplished on these engines was that of Caboury et al (1), Breed and Boudrey (2), Lardell and Black (7), and Nikel and McElwiney (4). The thesis by Caboury et al indicates that IMEP in the three engines operating at the same piston speed conformed quite closely to predicted results. However the measured BMEP did not agree with theory due to variations in FMEP. Caboury's work included both firing and motoring runs and showed somewhat better agreement in the motoring condition than when firing.

The purpose of this investigation is to determine the experimental friction contribution of the major components of each engine to the FMEP in motoring condition. It was hoped that such data might provide an understanding of the reason for the variation of FMEP between the three engines. Also it would serve to check previous work.

to check previous work.

reason for the variation of CMBT between the three engines. Also it would prove
specification of the major components of each engine to the CMBT is obtained.
available. It was hoped that such data might provide an understanding of the

The purpose of this investigation is to determine the mechanical efficiency
and almost complete cylinder filling. [illegible] Dalgarno's work included both firing and motoring runs
to graphical results. However the measured BMEP did not agree with theory due
to mechanical losses in CMBT. Dalgarno's work included both firing and motoring runs

The tests were carried out on three Petter single cylinder [illegible]
[illegible] and similarly [illegible]. The theory is derived from [illegible]
that of Annand et al [1], Annand and Dowling [2], Tabaczynski and Hlavac [3], and
all assume [illegible] dimensionless [illegible] to one term [illegible].

The main friction work [illegible] on these engines was
BMEP, MMEP and IMEP were in the same [illegible] as the motor [illegible]
to study motored engine [illegible]. It would also permit of other [illegible] of
use of motor [illegible] tests engines to [illegible] characteristics at large
motives.

The theory relies that is the engine operating at the same [illegible]
[illegible] the piston speed, [illegible] and [illegible] are [illegible]
the [illegible] [illegible] [illegible] [illegible] [illegible] [illegible]
[

EQUIPMENT

The three engines under discussion are single cylinder, four stroke, spark ignition machines of 2½, 4, and 6 inch bore. All engine dimensions and accessory equipment are proportioned in the same ratio as the bores (3). Dynamometers on the 2½ and six inch engines are of the alternating current drive type with Dynamatic magnetic speed control clutches. The 4 inch engine is equipped with a conventional direct current dynamometer. All machines are equipped with a sensitive hydraulic torque measuring device (7). Each engine is installed in an individual test cell mounted on a spring-supported bed plate complete with inlet surge tank, vaporizing tank and exhaust surge tank. Cooling water is circulated by a separate pump, and temperature controlled through a steam jacketed heat exchanger. A circulating oil pump is provided for a high velocity oil circuit through the crankcase and heat exchanger. This provides close and homogeneous temperature control of the lubricating oil. An additional oil pressure pump is installed for bearing and cylinder lubrication. Oil and water circuits are fitted with direct-reading thermometers. A thermocouple is installed at the main bearing surface in each engine. A diagrammatic sketch of the equipment and arrangement may be found in Appendix 'A'.

PROCEDURE

Each engine was motored in three different conditions of assembly, as described below and shown by sketch in Appendix "B".

Condition "A": Engine completely assembled. Friction elements are two main bearings, crank journal, piston and rings, timing gear drive yoke bushing, main oil seal, timing gears and bushings, camshaft bearings, cam followers and valves. No inlet and exhaust pipes were fitted, nor was the ignition equipment.

Condition "B": Crankshaft, cylinder, piston and connecting rod installed. No cylinder head, camshaft gear or valve pushrods. Friction elements are as in Condition 'A' without idler gear and valve train.

Condition "C": Crankshaft and idler gear installed. No cylinder, piston, connecting rod or camshaft gear. Friction elements are two main bearings, timing gear drive yoke bushing, timing pinion, idler gear and the main oil seal. On those runs an aluminum sleeve was placed over the crank journal to prevent loss of oil pressure.

In each condition the engines were operated over a speed range from zero to 1650 feet per minute piston speed. Oil temperatures were held constant at 120° F., circulating water inlet at 180° F., circulating water flow rate was held constant at one value of flow per unit area. In addition of oil care sufficient time was allowed for equilibrium conditions to prevail. A series of readings were observed at each run to show systematically that conditions were substantially constant.

In previous work on the engines, no attempt had been made to measure or regulate the jacket water flow rate. For this investigation 1.5" square edged standard orifices were inserted into the water circulation system and calibrated. The first work conducted on the 2½" engine then consisted of a series of runs to determine what effect, if any, variation

consisted of a series of runs to determine what effect, if any, multiplication errors had on the system. The first run consisted of the 'Q' system when multiplication errors were not allowed. The second run allowed the 'Q' system to make multiplication errors. The third run allowed the 'Q' system to make multiplication errors and the fourth run allowed the 'Q' system to make multiplication errors and to be penalized twice as much as shown in Appendix 'B'.

In practice work on the machine, to attempt not even to maintain the same relationship [illegible] a series of machine runs consisting [illegible] In addition to all that addition time was allowed for multiplication errors [illegible] made [illegible] multiplication errors [illegible] made [illegible] multiplication errors [illegible] made [illegible]

in coolant flow rate would have on engine friction results. On all subsequent runs a water flow of .084 #/sec./in.^{2} was arbitrarily used.

In concluding the first series of high speed runs on the 2$\frac{1}{2}$" engine in "2" condition, a sudden change in friction and bearing temperature measurements indicated the possibility of a bearing derangement. The engine was dismantled and flaking off of the babbitt in the outer main bearing was discovered. Previous difficulty had been experienced with these bearings in that the very thin babbitt layer (.003") had not been fully bonded to the backing material. Several attempts at manufacture of new bearings also resulted in poor babbitt bond, so both main bearings on this engine were changed using solid phosphor bronze as the bearing material. Investigation of bearing clearances at this time showed that the connecting rod bearing clearance was not as specified by similitude requirements. To rectify this a bronze backed bearing was installed with clearance increased from .001" to .0025". Therefore when the 2$\frac{1}{2}$" engine was returned to service all three principle bearings had been changed to bronze with increased clearance in the connecting rod bearing.

Early in the investigation, in using the magnetically-coupled type of dynamometer it was noticed that the hydraulic torque-scale zero reading varied appreciably depending upon whether the zero was set with the dynamometer motor running or with the entire machine shut down. By disconnecting the dynamometer output shaft from the engine, it was determined that some form of drag existed in the magnetic coupling even with no excitation on. As a result all scale zeroes were set with the dynamometer completely off. A small possible error was also detected as related to the cooling water flow through the dynamometer. Insofar as cooling water is required for normal operation, this valve was left open when setting the scale zero.

At every opportunity measurements were taken of principal engine parts and recorded in Appendix B. The 2½" engine rings were found to have considerably more relative spring tension than the other two engines and were subsequently modified to conform more closely with similitude requirements.

After completing all other experimental runs, the main oil seal was removed from the 2½" engine and the engine run in the "A" condition to determine the magnitude of the friction contribution of this oil seal.

RESULTS

The observations resulting from this investigation are contained in the subsequent data sheets. The smooth data is plotted in Figures 1 to 8. Fig. 1 shows the results obtained on the 2½" engine with systematically varied cooling water flow rates. All other mechanical map curves are for constant cooling water rate, and constant inlet oil and water temperatures. For purposes of easy comparison these data were plotted first for each engine in three different conditions of assembly, and again for each condition of assembly for the three different engines.

DISCUSSION

This investigation involved the first attempt to correlate the rate of cooling water flow between the three engines. After calibrating flow orifices, it was intended that each engine be run with equal flow per unit area. At the start of the runs on the 2¼" engine it became a matter of interest to determine any possible variation in friction as a function of coolant flow. Therefore runs were made at five different flow rates and the results plotted in Fig. 2. This curve shows no significant variation in mechanical mean effective pressure that can be attributed to flow rate alone. All other friction runs were then run at constant coolant flow rate per unit area.

Fig. 2 shows the results obtained on the 2¼" engine. The results that were obtained in the "B" condition both before and after dismantling the engine for new bearings are plotted in Fig. 3. No significant change in friction occurred after changing both main and connecting bearings from babbitt to bronze, increasing the normal clearance and reducing the relative ring tension by more than one-half. The curves of Fig. 2 in the "A" condition both with and without the oil seal show that this seal constitutes a large proportion of the total friction particularly at low speeds where the seal probably operated largely in the boundary region of fluid friction. The complete engine or "A" condition curve is significantly lower than that obtained by Obbeury et al, but it must be emphasized that in this investigation the engines were run without inlet and exhaust surge tanks or piping, so that the pumping contribution of Obbeury's curve cannot be compared on an identical basis.

Figure 3 is the result for the 4" engine. In this machine the "A" condition curve is somewhat closer to Obbeury et al than on the 2¼" engine. Figure 4 is the plotted data for the 5" engine. The trends are comparable to the 4" machine.

to the A_2 motion.

Figure 6 is the plotted data for the A_2 motion. The "mean to one-sample Student" test was used to determine if the mean value of the data points was significantly different from zero. All of the points were found to be significantly different from zero at the 95% level. The curve shows a slightly oscillatory motion about the mean value. The oscillations are damped out after about one cycle.

Figure 7 shows the results for the A_3 motion. The results were obtained in the same manner as those for the A_2 motion. No significant change in motion for the positions are plotted in 0.5° D. No significant change in motion occurred after oscillation took well and one period from position to another, indicating the second electrode and reduction the relative ring to become" increased by more than one-half." The curves of Fig. 8 the "A" Demolition Station and without the oil seal show that this seal contributes a large damping of the total fraction particularly at low speeds where the seal is apparently damped by the boundary region of fluid friction. The Station of A_4 Demolition curve is significantly lower than that obtained by Ostwald et al, but it must be compensated that in this instance the motion does not exhibit any damped oscillations.

Figure 9 is the result for the A_5 motion. The curve is a typical Student plot. Other oscillating flow motions, it was found that each motion be compared with equal flow per unit time. It is seen that the A_5 motion is damped out after one cycle.

The investigation involved the first attempt to correlate the rate

Figure 5 is the result for the three engines in the 'A' or complete engine condition. These curves show definitely that within the range of experimental error the motoring FMEP is the same for all engines.

Figure 6 is the same for the 'B' condition, and also shows that mechanical mean effective pressure for the three engines is the same within the limits of experimental accuracy.

Figure 7 is the 'C' or bare-crankshaft condition of operation. These curves show a somewhat greater spread than conditions 'A' and 'B'.

Figure 8 compares the friction developed in the 2½" engine with and without the main oil seal. The friction contribution of this seal is large, particularly at low speed where the seal may operate largely in the boundary realm of fluid friction. It is manifestly difficult to design and obtain this type of seal on any basis that would guarantee geometric similitude. Among the variants would be rubber hardness, area of contact, the change of rubber properties with time and of course surface characteristics of the shaft. Note that the maximum friction contribution of the seal in the 2½" engine is approximately one-half the total for the 'C' or bare-crankshaft condition. It was also noted that in running without the oil seal the equilibrium temperatures of the main bearing were considerably lower than in the comparable condition with seals installed. A correction for oil viscosity might then magnify the difference between these two curves.

It was considered by the authors throughout the experimental work that the accuracy of reading the hydraulic scale was about .7# BHP (.2" mercury scale reading) varying slightly between engines.

A possible cause of disagreement with similar engine theory lies in the inherent difficulty of satisfying the requirement that $\frac{\mu}{\rho l}$ be the same in all engines (see appendix "A"). Assuming that the viscosity-temperature characteristics of the three lubricating oils used would be similar, it is not likely

lation of the three injection oils used would be similar, it is not likely
engines [illegible] [illegible]
A possible cause of disagreement with similar engines though [illegible] is the
[illegible] [illegible] [illegible]
[illegible] [illegible] [illegible]
the necessity of relying on [illegible] [illegible] [illegible]
[illegible] [illegible] [illegible]
[illegible] [illegible] [illegible]
[

that the temperature at the friction surfaces would be the same in all the engines. Still another reason for departure from theory is the fact that real bearings do not operate under the assumptions involved in the classical theory (Petroff) of lubrication, upon which the similar engine theory is based.

Conclusions

The conclusions arising from the data of this investigation are as follows:

1. The theory, which predicts that the FMEP and BMEP of similar engines operating at the same piston speed will be the same, is a valid one, for engines under motoring conditions.
2. The use of a contact type oil seal may introduce large friction forces and is a component of uncertain behaviour in experimental engines of this type.
3. The effect of cooling water velocity on FMEP is negligibly small for motoring conditions.

Recommendations

In view of the strong diversity between the metering FMEP obtained by Mansury et al and the 'A' condition results of this investigation, it is recommended that more firing data be collected on the 2g^{n} engine to (1) check previous data or (2) determine if the changes made on the engine during this investigation will have any effect upon FMEP firing.

The rubber contact type oil seals in all three engines should be replaced by a non-contact oil seal. If this is undertaken another series of metering data should be collected to compare with the results of this thesis.

Conclusion

In this we have discussed several methods for computing the Jacobi symbol. The first method is the most efficient, but requires the factorization of the number. The second method is the most elementary, but requires the most steps. The third method is a compromise between the first two. It is the most commonly used method.

The Jacobi symbol has many applications in number theory. For example, it can be used to determine if a number is a quadratic residue modulo a prime. It can also be used to determine if a number is a quadratic residue modulo a composite number, but this is not as useful.

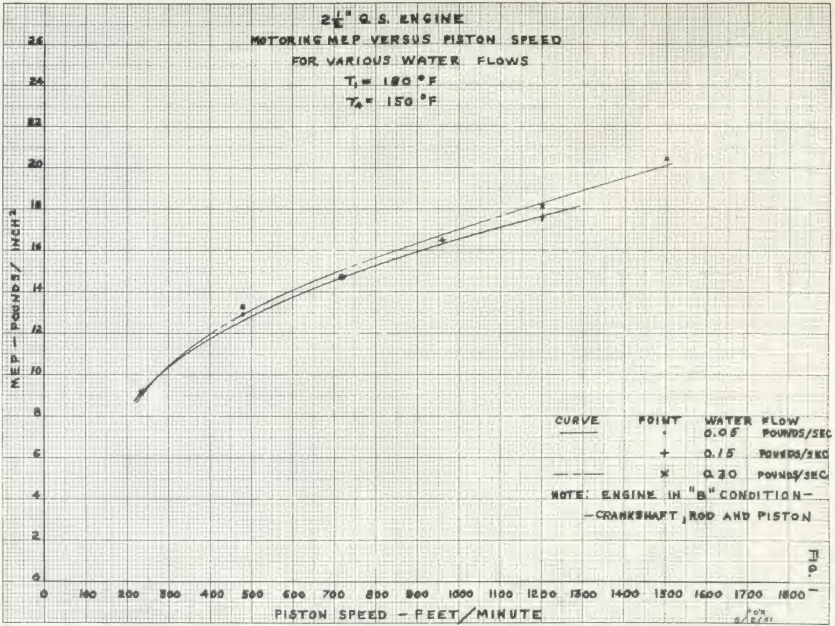
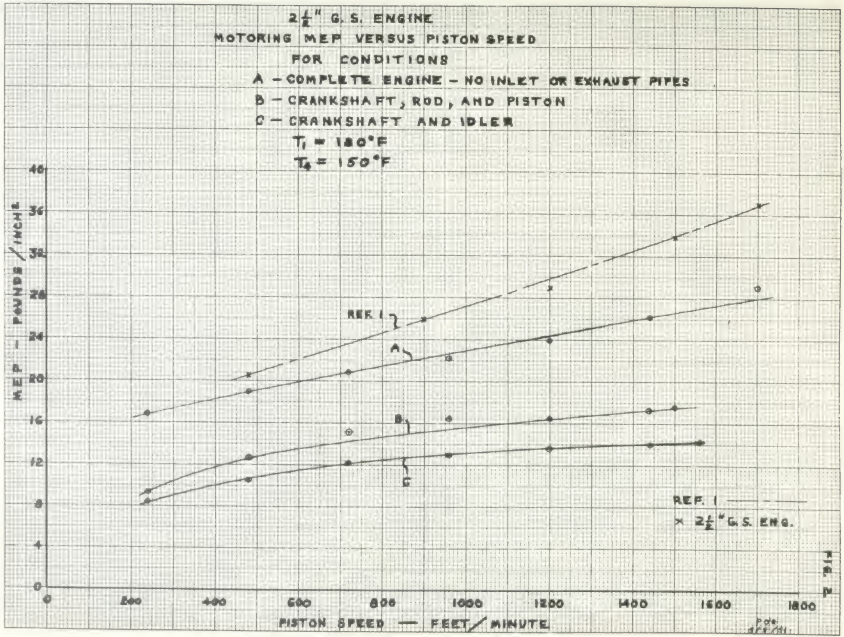
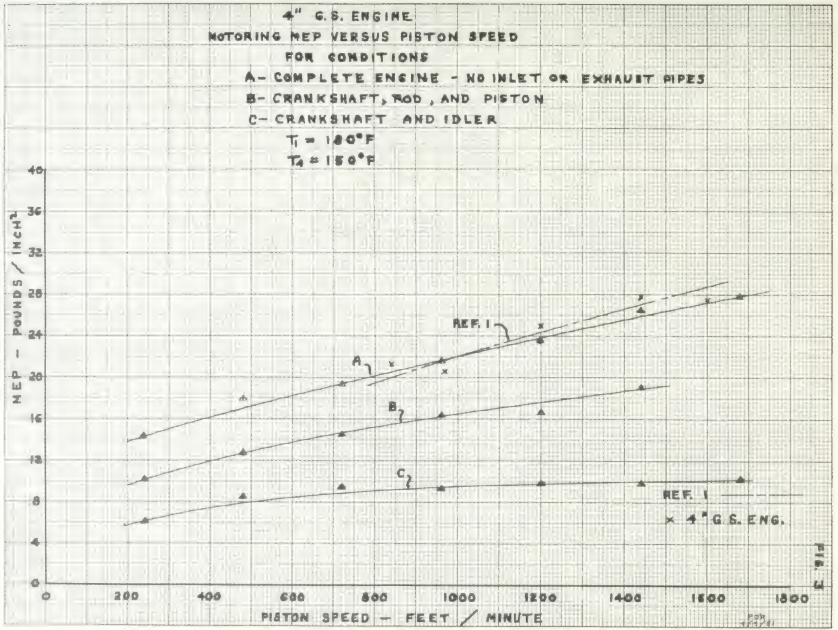
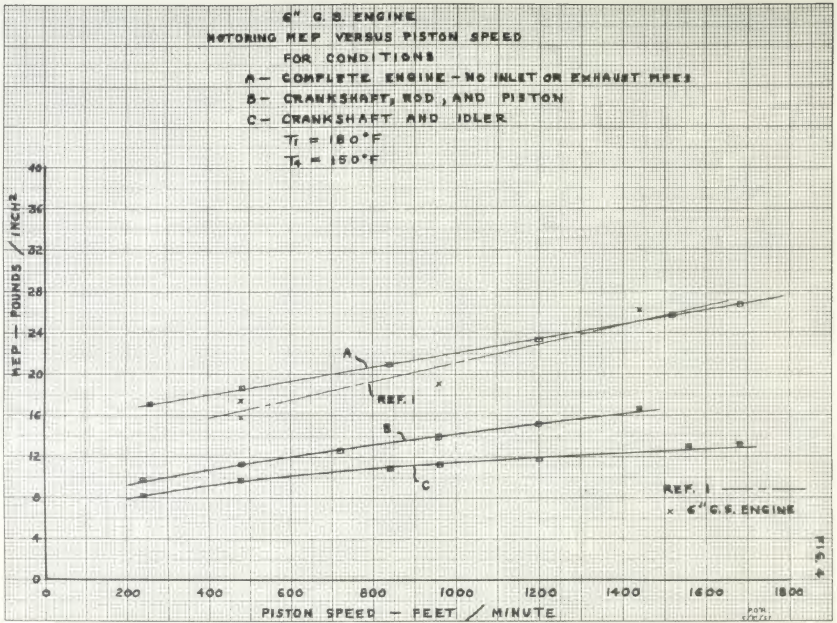
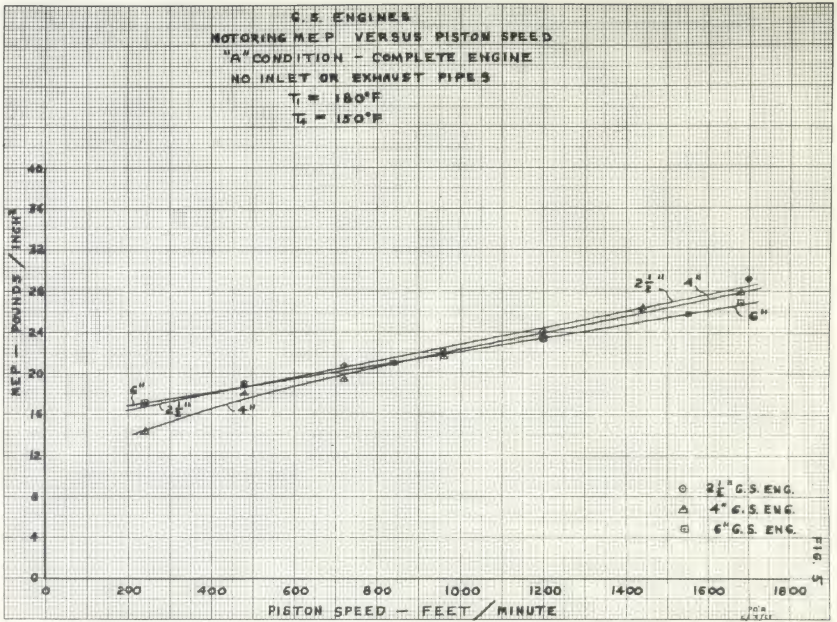

2½" Q.S. ENGINE
MOTORING M.E.P. VERSUS PISTON SPEED
FOR VARIOUS WATER FLOWS
T1 = 180 °F
T4 = 150 °F
M.E.P. — POUNDS/INCH²
0
2
4
6
8
10
12
14
16
18
20
22
24
26
0
100
200
300
400
500
600
700
800
900
1000
1100
1200
1300
1400
1500
1600
1700
1800
PISTON SPEED — FEET/MINUTE
CURVE
POINT
WATER FLOW
——— • 0.05 POUNDS/SEC
+ 0.15 POUNDS/SEC
– – – × 0.30 POUNDS/SEC
NOTE: ENGINE IN "B" CONDITION —
— CRANKSHAFT, ROD AND PISTON


Fig.



2½" G. S. ENGINE
MOTORING MEP VERSUS PISTON SPEED
FOR CONDITIONS
A — COMPLETE ENGINE — NO INLET OR EXHAUST PIPES
B — CRANKSHAFT, ROD, AND PISTON
C — CRANKSHAFT AND IDLER
T_i = 180°F
T_e = 150°F
MEP — POUNDS / INCH²
REF. 1
A
B
C
REF. 1
× 2½" G.S. ENG.
PISTON SPEED — FEET / MINUTE
0
400
800
1200
1600
2000
4
8
12
16
20
24
28
32
36
40



4" G.S. ENGINE
MOTORING MEP VERSUS PISTON SPEED
FOR CONDITIONS
A- COMPLETE ENGINE - NO INLET OR EXHAUST PIPES
B- CRANKSHAFT, ROD, AND PISTON
C- CRANKSHAFT AND IDLER
T_i = 180°F
T_4 = 150°F
MEP - POUNDS / INCH²
PISTON SPEED - FEET / MINUTE
REF. 1
A
B
C
REF. 1
× 4" G.S. ENG.
0
4
8
12
16
20
24
28
32
36
40
200
400
600
800
1000
1200
1400
1600
1800


6" G. B. ENGINE
MOTORING MEP VERSUS PISTON SPEED
FOR CONDITIONS
A — COMPLETE ENGINE — NO INLET OR EXHAUST PIPES
B — CRANKSHAFT, ROD, AND PISTON
C — CRANKSHAFT AND IDLER
T_i = 180°F
T_4 = 150°F
MEP — POUNDS / INCH²
PISTON SPEED — FEET / MINUTE
A
B
C
REF. 1
REF. 1
× 6" G.B. ENGINE
FIG 4


G.S. ENGINES
MOTORING M.E.P. VERSUS PISTON SPEED
"A" CONDITION - COMPLETE ENGINE
NO INLET OR EXHAUST PIPES
T₁ = 180°F
T₄ = 150°F
M.E.P. — POUNDS / INCH²
PISTON SPEED — FEET / MINUTE
2½"
4"
6"
⊙ 2½" G.S. ENG.
△ 4" G.S. ENG.
⊡ 6" G.S. ENG.
FIG. 5

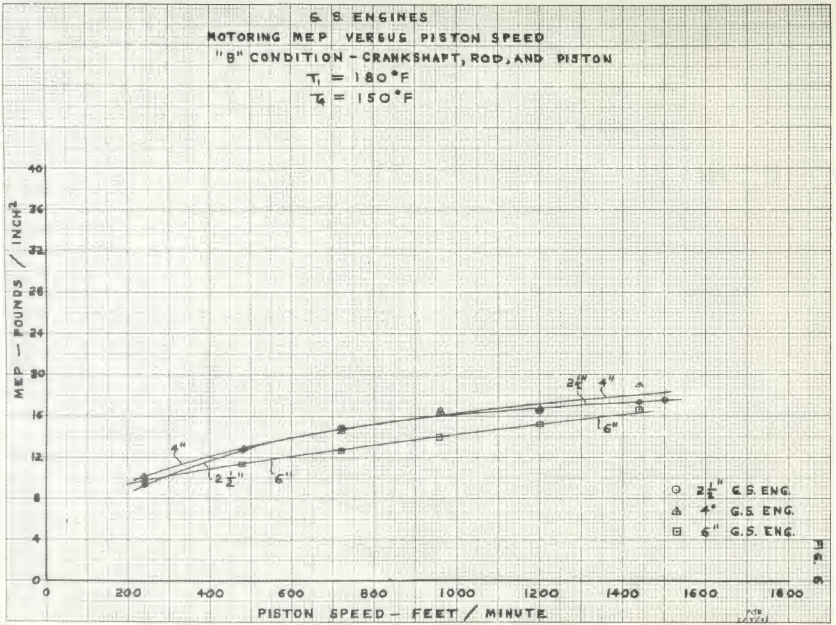
G. S. ENGINES
MOTORING MEP VERSUS PISTON SPEED
"B" CONDITION - CRANKSHAFT, ROD, AND PISTON
T1 = 180°F
T4 = 150°F
MEP - POUNDS / INCH²
PISTON SPEED - FEET / MINUTE
0
200
400
600
800
1000
1200
1400
1600
1800
4
8
12
16
20
24
28
32
36
40
2½"
4"
6"
⊙ 2½" G.S. ENG.
△ 4" G.S. ENG.
⊡ 6" G.S. ENG.

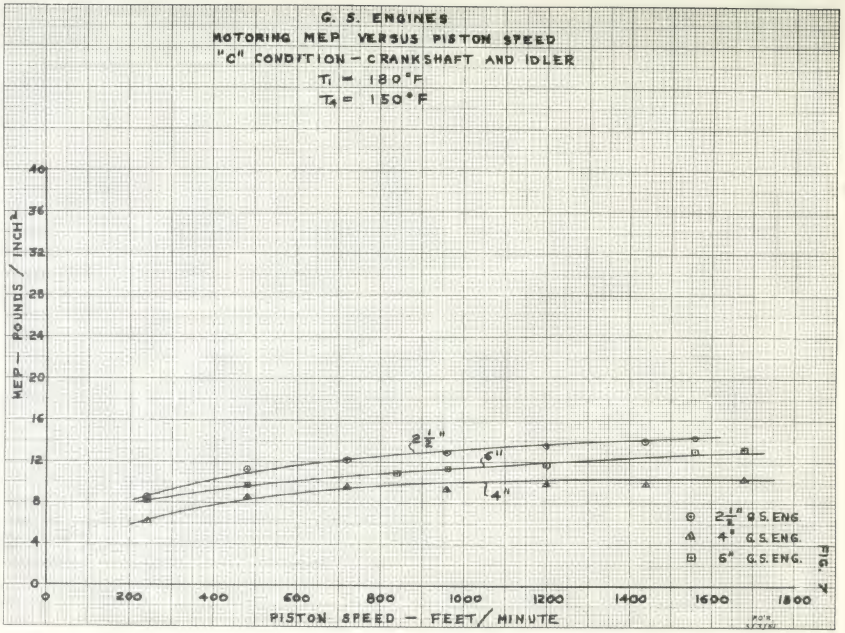
G. S. ENGINES
MOTORING MEP VERSUS PISTON SPEED
"C" CONDITION – CRANKSHAFT AND IDLER
T_1 = 180°F
T_4 = 150°F
MEP – POUNDS / INCH²
PISTON SPEED – FEET / MINUTE
0
200
400
600
800
1000
1200
1400
1600
1800
4
8
12
16
20
24
28
32
36
40
$2\frac{1}{2}$"
5"
4"
⊙ $2\frac{1}{2}$" G.S. ENG.
△ 4" G.S. ENG.
⊞ 6" G.S. ENG.

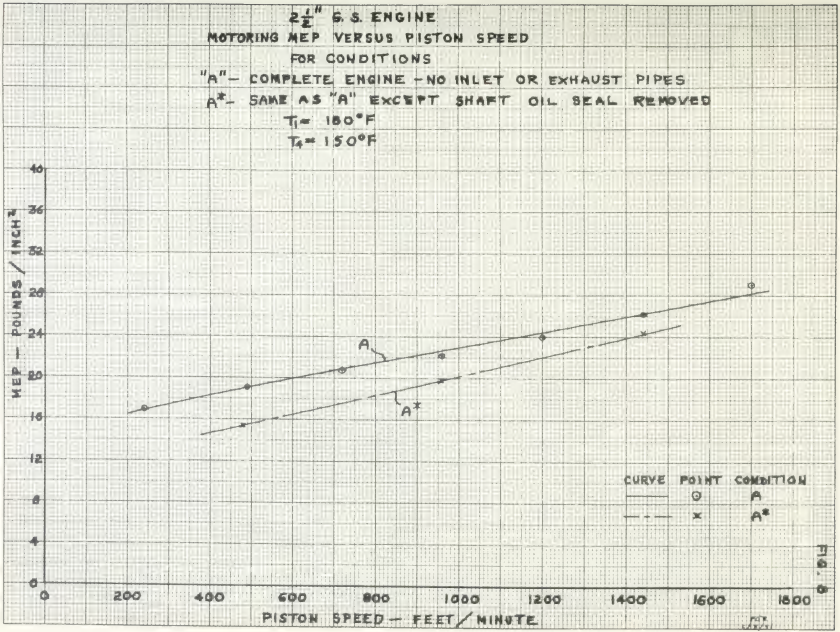
2½" G.S. ENGINE
MOTORING MEP VERSUS PISTON SPEED
FOR CONDITIONS
"A"- COMPLETE ENGINE - NO INLET OR EXHAUST PIPES
A*- SAME AS "A" EXCEPT SHAFT OIL SEAL REMOVED
T1= 180°F
T4= 150°F
MEP - POUNDS / INCH²
0
4
8
12
16
20
24
28
32
36
40
A
A*
CURVE POINT CONDITION
A
A*
0
200
400
600
800
1000
1200
1400
1600
1800
PISTON SPEED - FEET / MINUTE

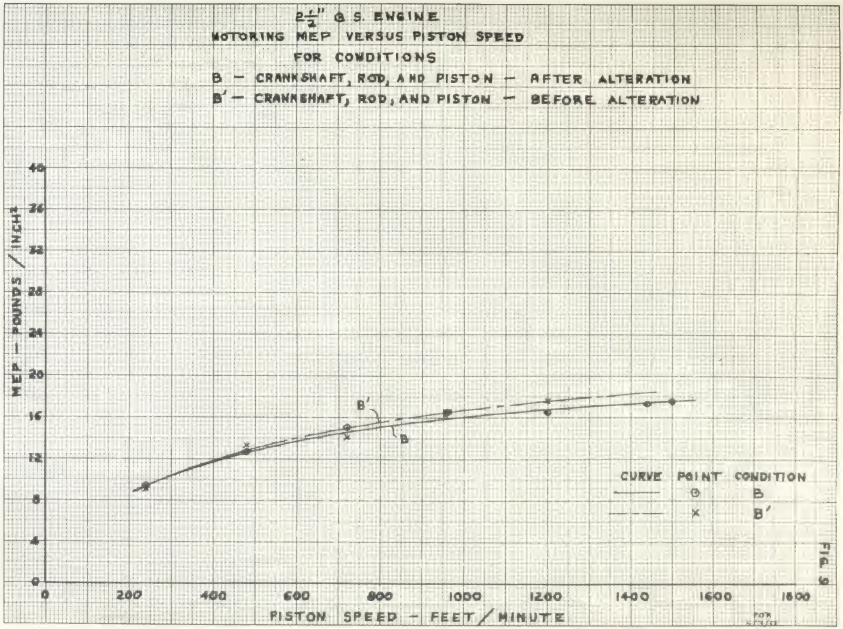

2 1/2" G.S. ENGINE
MOTORING MEP VERSUS PISTON SPEED
FOR CONDITIONS
B — CRANKSHAFT, ROD, AND PISTON — AFTER ALTERATION
B' — CRANKSHAFT, ROD, AND PISTON — BEFORE ALTERATION
MEP — POUNDS / INCH²
0
4
8
12
16
20
24
28
32
36
40
0
200
400
600
800
1000
1200
1400
1600
1800
PISTON SPEED — FEET / MINUTE
B'
B
CURVE
POINT
CONDITION
⊙
B
×
B'
FIG. 9

TABLE I

$2\frac{1}{2}$" G.S. ENGINE
A-CONDITION - COMPLETE ENGINE
T_1 = 180°F T_4 = 150°F

28 APRIL 1951

RUN	RPM	S	d'	d	h'	h	T_1	T_2	T_4	T_6	T_7'	T_7	T_8'	T_8	MEP	FINAL MEP
A-1	480	240	-3.9	6.1	5.1	4.9	178	178	148	146	120	121	178	180	17.6	
			-3.8	6.1	5.3	4.7	180	180	150	148	121	122	178	180	16.87	
			-3.9	6.1	5.3	4.7	180	180	151	151	127	128	178	180	16.87	16.87
A-2	960	480	-3.9	6.1	4.7	5.3	180	180	150	150	140	141	176	178	19.00	
			-3.9	6.1	4.7	5.3	180	180	150	150	141	142	177	179	19.00	19.00
A-3	1440	720	-3.9	6.1	4.2	5.8	180	180	150	150	154	155	181	183	20.80	
			-3.9	6.1	4.2	5.8	180	180	151	151	154	155	181	183	20.80	20.80
A-4	1920	960	-3.9	6.1	3.8	6.2	178	178	149	148	164	165	182	184	22.20	
			-3.9	6.1	3.8	6.2	180	180	150	150	164	165	183	185	22.20	
			-3.9	6.1	3.8	6.2	180	180	150	150	164	165	183	185	22.20	22.20
A-5	2400	1200	-3.9	6.1	3.2	6.8	180	180	152	152	175	177	186	188	24.40	
			-3.9	6.1	3.3	6.7	180	180	150	151	175	177	186	188	24.00	
			-3.9	6.1	3.3	6.7	180	180	150	150	175	177	186	188	24.00	24.00
A-6	2880	1440	-3.9	6.1	2.7	7.3	181	181	150	151	183	185	187	189	26.20	
			-3.9	6.1	2.7	7.3	180	181	151	153	184	186	187	189	26.20	
			-3.9	6.1	2.7	7.3	178	180	150	153	184	186	186	188	26.20	26.20
A-7'	3400	1700	-3.9	6.1	1.8	8.2	180	180	153	154	192	194	188	190	28.40	
			-3.9	6.1	1.8	8.2	180	181	151	154	193	195	189	191	28.40	
			-3.9	6.1	1.9	8.1	181	182	150	153	193	195	190	192	29.10	
			-3.9	6.1	1.9	8.1	181	182	150	152	193.5	196	190	192	29.10	29.10

NOTE: A-7' MAXIMUM SPEED RUN d' SCALE ZERO AT -10.0 h' SCALE ZERO AT 10.0

SAMPLE CALCULATION

$2\frac{1}{2}$" G.S. ENGINE RUN A-1 28 APRIL 1951

$$k \times h = MEP$$
$$3.59 \times 4.9 = 17.6 \text{ P.S.I.}$$

h = SCALE READING
k = DYNAMOMETER SCALE CONSTANT

DYNAMOMETER SCALE CONSTANTS

ENGINE	k
$2\frac{1}{2}$"	3.59
4"	3.28
6"	3.88

TABLE II

$2\frac{1}{2}$" G.S. ENGINE

A* CONDITION – COMPLETE ENGINE - SHAFT OIL SEAL REMOVED

T_1 = 180°F T_4 = 150°F

1 MAY 1951

RUN	RPM	S	d'	d	h'	h	T_1	T_2	T_4	T_6	T_7'	T_7	MEP	FINAL MEP
A*-4	1920	960	-3.9	6.1	4.4	5.6	184	184	152	150	144	145	20.10	
			-3.9	6.1	4.5	6.5	185	185	152	151	146	147	19.75	
			-3.9	6.1	4.5	5.5	183	183	152	150	146	147	19.75	19.75
A*-6	2880	1440	-3.9	6.1	3.2	6.8	180	180	152	152	162	163	24.40	
			-3.9	6.1	3.2	6.8	178	178	148	147	166	166	24.40	
			-3.9	6.1	3.2	6.8	180	180	153	152	166	167	24.40	24.40
A*-4	1920	960	-3.9	6.1	4.5	5.5	178	178	152	152	153	154	19.75	CHECK
A*-2	960	480	-3.9	6.1	5.7	4.3	180	180	162	149	139	140	15.45	
			-3.9	6.1	5.7	4.3	180	180	162	149	139	140	15.45	15.45

d' SCALE ZERO AT -10.0
h' SCALE ZERO AT 10.0

TABLE III

$2\frac{1}{2}$" G. S. ENGINE

B' CONDITION - CRANKSHAFT, ROD AND PISTON-BEFORE ALTERATION

T_1 = 180°F T_4 = 150°F

31 JANUARY 1951

RUN	RPM	S	d'	d	h'	h	T_1	T_2	T_4	T_6	T_7'	T_7	T_8'	T_8	MEP	FINAL MEP
B-13	480	240	-3.9	6.1	7.45	2.55	180	182	150	148	130.5	131.5	179	181	9.15	
			-3.9	6.1	7.40	2.60	180	182	150	148	130.5	131.5	179	181	9.34	
			-3.9	6.1	7.50	2.50	180	182	150	148	130.5	131.5	179	181	8.96	
			-3.9	6.1	7.40	2.60	180	182	150.5	148.5	130.6	131.5	179.5	181	9.34	9.20
B-11	480	240	-9.8	0.7	7.45	2.55	181	184	150	148	130.5	131.5	179.5	181	9.15	
			-9.3	0.7	7.40	2.60	180	182.5	150	148	131	132	178.0	180	9.34	
			-9.3	0.7	7.50	2.50	180	184	150	148	130.5	131.5	179.0	181	8.96	
			-9.25	0.75	7.45	2.55	180	183.5	150	148	130.5	131.5	179.0	181	9.15	9.15
B-21	960	480	-9.25	0.75	6.45	3.55	180.5	184	151	149	145	146	182.5	185	12.75	
			-9.25	0.75	6.35	3.65	180.0	183	150	148	144	146	181	183	13.10	
			-9.25	0.75	6.40	3.60	180.5	184	149.5	148	144.5	146.5	182	184	12.92	
			-9.25	0.75	6.40	3.60	180.0	183	150	148.5	144.	145	181	183	12.92	12.92
B-23	960	480	-3.85	6.15	6.30	3.70	181	182	151	150	143	144	182	184	13.29	
			-3.90	6.10	6.30	3.70	180	182	150.5	150	143	144	181	183	13.29	
			-3.75	6.25	6.30	3.70	178	179.5	150	149	143	144	179	181	13.29	
			-3.75	6.25	6.30	3.70	178	179	150	148.5	143	144	178	180	13.29	13.29
B-25	960	480	+12.5	22.5	6.30	3.70	180	182	149	147	143	144	181	183	13.29	
			+12.4	22.4	6.30	3.70	180.5	182	150	148	143	144	181	183	13.29	13.29
B-55	2400	1200	+12.6	22.6	4.95	5.05	179	180	151	150	177	179	183	186	18.13	
			+12.6	22.6	4.95	5.05	180	181	151	149.5	178	180	183	186	18.13	18.13
B-53	2400	1200	-3.9	6.1	5.10	4.90	181	183	150	149.5	179	181	186	188.5	17.60	
			-3.9	6.1	5.10	4.90	181	183	151	150	180	182	187	189.5	17.60	17.60
B-51	2400	1200	-9.2	0.8	5.15	4.85	180	183	150	148.5	180	182	188	191	17.41	
			-9.2	0.8	5.15	4.85	180	183	148	148	180	182	187	189.5	17.41	17.41
								13 FEBRUARY 1951								
B-15	480	240	+12.0	22.0	7.4	2.6	182	183	152	150	128	130	179	180		
			+12.0	22.0	7.4	2.6	180	182	152	150	128	129	178	179		
			+12.0	22.0	7.45	2.55	180	181	151	150	128	129	177	178	9.22	
			+12.0	22.0	7.45	2.55	179	180	150	149	128	129	176	177	9.22	9.22
								14 FEBRUARY 1951								
B-35	1440	720	+12.5	22.5	5.90	4.10	182	184	150	148	153	154	183	185	14.70	
			+12.5	22.5	5.90	4.10	180	182	152	150	154	155	182	184	14.70	
			+12.5	22.5	5.90	4.10	180	181	151	149	154.5	155	181	183	14.70	14.70

d' SCALE ZERO AT -10.0

h' SCALE ZERO AT 10.0

TABLE III (CONTINUED)

RUN	RPM	S	d'	d	h'	h	T_1	T_2	T_4	T_6	T_7'	T_7	T_8'	T_8	MEP	FINAL MEP
						14 FEBRUARY 1951										
B-33	1440	720	-3.6	6.4	5.90	4.10	180	180	150	148	156	157	181	183	14.70	
			-3.6	6.4	5.90	4.10	180	181	150	148	156	157	182	184	14.70	14.70
B-31	1440	720	-9.3	0.7	6.90	4.10	180	182	150	148	156	157	182	184	14.70	
			-9.8	0.7	5.90	4.10	180	181	150	149	156	157	180.5	183	14.70	14.70
						19 FEBRUARY 1951										
B-41	1920	960	-9.1	0.9	5.40	4.60	178	185	150	148	165	166	180	182	16.50	
			-9.1	0.9	5.45	4.55	180	183	150	148	165	166	180	182	16.50	16.50
B-43	1920	960	-3.8	6.2	5.40	4.60	178	178	150	148	165.5	167	179	181	16.50	
			-3.8	6.2	5.40	4.60	180	181	150	148	165.6	167	180	182	16.50	16.50
B-65	3000	1500	+12.6	22.6	4.30	5.70	180	181	150	150	190	192	186	188	20.46	20.46

d' SCALE ZERO AT -10.0
h' SCALE ZERO AT 10.0

NOTE: IN RUN DESIGNATOR LETTER INDICATES CONDITION OF ASSEMBLY
FIRST NUMBER INDICATES SPEED
SECOND NUMBER INDICATES COOLING WATER FLOW RATE AS:

1 — 0.05 #/SEC
2 — 0.10 #/SEC.
3 — 0.15 #/SEC.
4 — 0.20 #/SEC.
5 — 0.30 #/SEC.

TABLE IV

$2\frac{1}{2}$" G. S. ENGINE

B CONDITION – CRANKSHAFT, ROD, AND PISTON – AFTER ALTERATION

T_1 = 180°F T_4 = 150°F

27 APRIL 1951

RUN	RPM	S	d'	d	h'	h	T_1	T_2	T_4	T_6	T_7'	T_7	T_8'	T_8	MEP	FINAL MEP
B-1	480	240	-3.9	6.1	6.9	3.1	180	180	149	147	114	115	175	177	11.10	
			-3.9	6.1	7.25	2.75	180	180	150	149	123	124	176	178	9.88	
			-3.9	6.1	7.30	2.70	182	182	150	148	125	126	179	181	9.70	
			-3.9	6.1	7.40	2.60	181	181	150	148	127	128	179	181	9.35	
			-3.9	6.1	7.40	2.60	180	180	150	148	127	128	178	180	9.35	
			-3.9	6.1	7.40	2.60	180	180	150	148	127	128	178	180	9.35	9.35
B-2	960	480	-3.9	6.1	6.35	3.65	180	180	150	149	144	145	177	179	13.10	
			-3.9	6.1	6.35	3.65	180	180	151	149	145	146	177	179	13.10	
			-3.9	6.1	6.60	3.40	180	180	150	149	145	146	177	179	12.20	
			-3.9	6.1	6.60	3.40	180	180	150	149	144	145	177	179	12.20	
			-3.9	6.1	6.45	3.55	180	180	150	149	146	147	177	179	12.72	12.72
B-3	1440	720	-3.9	6.1	5.80	4.20	180	180	150	149	157	158	179	181	15.08	
			-3.9	6.1	5.70	4.30	180	180	150	149	158	159	178	180	15.42	
			-3.9	6.1	5.75	4.25	180	180	150	149	159	160	178	180	15.25	
			-3.9	6.1	5.80	4.20	180	180	150	149	159	160	178	180	15.08	15.08
B-4	1920	960	-3.9	6.1	5.30	4.70	179	179	150	150	173	175	180	182	16.88	
			-3.9	6.1	5.20	4.80	180	180	150	150	175	177	180	182	17.20	
			-3.9	6.1	5.30	4.70	180	180	150	150	167.5	170	181	183	16.88	
			-3.9	6.1	5.40	4.60	180	180	150	150	168	170	181	183	16.50	16.50
B-5	2400	1200	-3.9	6.1	5.10	4.90	181	180	150	150	183	185	183	185	17.60	
			-3.9	6.1	6.40	4.60	180	180	149	148	176	178	183	185	16.50	
			-3.9	6.1	5.40	4.60	180	180	150	150	172	174	180	182	16.50	
			-3.9	6.1	5.40	4.60	180	180	150	150	174	176	180	182	16.50	16.50
B-6	2880	1440	-3.9	6.1	5.20	4.80	178	178	151	151	180	182	182	184	17.22	
			-3.9	6.1	5.20	4.80	179	179	150	150	181	183	183	185	17.22	17.22
B-7'	3000	1500	-3.9	6.1	5.10	4.90	180	180	150	150	184	186	186.5	189	17.60	
			-3.9	6.1	5.10	4.90	180	180	150	150	184	186	186	188	17.60	17.60

NOTE: B-7' MAXIMUM SPEED RUN

d' SCALE ZERO AT -10.0
h' SCALE ZERO AT 10.0

TABLE V

$2\frac{1}{2}$" G.S. ENGINE

C CONDITION - CRANKSHAFT AND IDLER

T_i = 180°F T_4 = 150°F

21 APRIL 1951

RUN	RPM	S	h'	h	T_4	T_6	T_7'	T_7	MEP	FINAL MEP
C*-2	960	480	7.0	3.0	154	150	116	117	10.77	
			7.1	2.9	148	146	132	133	10.40	
			7.1	2.9	150	149	133	134	10.40	10.40
C*-5	2400	1200	6.4	3.6	151	150	162	163	12.90	
			6.5	3.5	151	150	166	167	12.57	
			6.6	3.4	151	150	168	169	12.20	
			6.6	3.4	151	150	168	169	12.20	12.20
C-2	960	480	6.85	3.15	150	149	137	138	11.30	
			6.85	3.15	150	149	137	138	11.30	
			6.85	3.15	150	150	137	138	11.30	11.30
C-3	1440	720	6.60	3.40	151	149	147	148	12.20	
			6.60	3.40	150	149	148	149	12.20	
			6.60	3.40	150	149	149	150	12.20	12.20
C-4	1920	960	6.40	3.60	150	149	162	163	12.90	
			6.40	3.60	146	146	162	163	12.90	
			6.40	3.60	148	146	164	166	12.90	
			6.40	3.60	150	149	164	166	12.90	12.90
C-5	2400	1200	6.10	3.90	150	148	176	178	14.30	
			6.20	3.80	150	149	176	178	13.60	
			6.20	3.80	150	149	176	178	13.60	13.60
C-6	2880	1440	6.00	4.00	150	150	185	187	14.35	
			6.10	4.00	150	150	185	187	14.00	
			6.10	3.90	150	150	185	187	14.00	14.00
C-7'	3120	1560	6.00	4.00	150	149	190	192	14.35	
			6.00	4.00	150	150	190	192	14.35	
			6.00	4.00	150	150	190	192	14.35	14.35
								23 APRIL 1951		
C-1	480	240	7.50	2.50	153	150	113	114	8.97	
			7.60	2.40	151	150	115.5	117	8.61	
			7.60	2.40	150	148	118	119	8.61	
			7.65	2.35	150	148	118.5	120	8.44	
			7.65	2.35	150	148	119.0	120	8.44	8.44

NOTE: C-7' MAXIMUM SPEED RUN h' SCALE ZERO AT 10.0

TABLE XI

4" G.S. ENGINE

A CONDITION - COMPLETE ENGINE

T_1 = 180°F T_4 = 150°F

13 MAY 1951

RUN	RPM	s	d'	d	h'	h	T_1	T_2	T_4	T_6	T_7	MEP	FINAL MEP
A-3	900	720	-2.0	6.0	3.8	6.2	178	178	148	149	154	20.4	
			-2.0	6.0	4.0	6.0	178	178	150	148	158	19.7	
			-2.0	6.0	4.0	6.0	178	178	146	146	158.5	19.7	
			-2.0	6.0	4.1	5.9	180	180	150	150	158	19.35	19.35
A-4	1200	960	-2.0	6.0	3.2	6.8	180	180	150	150	171	22.3	
			-2.0	6.0	3.2	6.8	181	181	151	150	172	22.3	
			-2.0	6.0	3.3	6.7	181	181	150	150	173	22.0	
			-2.0	6.0	3.6	6.4	180	180	150	150	173	21.0	
			-2.0	6.0	3.4	6.6	180	180	150	150	173	21.6	21.60
A-5	1500	1200	-2.0	6.0	2.7	7.3	180	180	150	150	188	23.85	
			-2.0	6.0	2.8	7.2	180	180	152	152	188.5	23.6	
			-2.0	6.0	2.8	7.2	180	180	150	150	188.5	23.6	23.60
A-6	1800	1440	-2.0	6.0	2.0	8.0	180	180	151	151	202	26.25	
			-2.0	6.0	2.0	8.0	180	180	150	150	202	26.25	26.25
A-7	2100	1680	-2.0	6.0	1.0	9.0	180	180	154	154	208	29.5	
			-2.0	6.0	1.5	8.5	180	180	154	154	210	27.9	
			-2.0	6.0	1.5	8.5	180	180	154	154	210	27.9	
			-2.0	6.0	1.5	8.6	180	180	154	154	210.5	27.9	27.90
A-2	600	480	-2.0	6.0	4.5	5.6	178	178	148	148	163	18.0	
			-2.0	6.0	4.5	6.5	180	180	150	150	153	18.0	
			-2.0	6.0	4.5	5.5	181	181	150	150	153.5	18.0	18.00
A-1	300	240	-2.0	6.0	5.6	4.4	181	181	150	150	143.0	14.4	
			-2.0	6.0	5.6	4.4	181	181	150	150	143.0	14.4	14.40

d' SCALE ZERO AT -8.0

h' SCALE ZERO AT 10.0

TABLE VII

4" G.S. ENGINE

B CONDITION - CRANKSHAFT, ROD, AND PISTON

T_1 = 180°F T_4 = 150°F

28 MARCH 1951

RUN	RPM	s	d'	d	h'	h	T_1	T_2	T_4	T_6	T_7	MEP	FINAL MEP
B-4	1200	960	-2.5	5.5	4.0	6.0	173	173	149	148	174	19.7	
			-2.5	5.5	4.3	5.7	178	178	151	151	176	18.7	
			-2.5	5.5	4.5	5.5	178	179	146	147	176	18.0	
			-2.5	5.5	4.7	5.3	180	180	154	154	176.5	17.4	
			-2.5	5.5	5.0	5.0	182	182	150	150	177.5	16.4	
			-2.5	5.5	5.0	5.0	182	182	150	150	178.5	16.4	
			-2.5	5.5	5.0	5.0	181	181	150	150	178.5	16.4	16.4
B-3	900	720	-2.5	5.5	5.6	4.4	179	179	150	150	166	14.45	
			-2.5	5.5	5.6	4.4	180	180	150	150	166	14.45	14.45
B-2	600	480	-2.5	5.5	6.2	3.8	180	180	150	150	157	12.48	
			-2.5	5.5	6.1	3.9	180	180	148	149	156.5	12.80	
			-2.5	5.5	6.1	3.9	181	181	150	150	156.5	12.80	12.80
B-1	300	240	-2.5	5.5	7.0	3.0	180	180	150	150	148	9.85	
			-2.5	5.5	6.9	3.1	181	180	150	149	147	10.20	
			-2.5	5.5	6.8	3.1	181	180	150	150	146	10.20	10.2
B-6	1800	1440	-2.5	5.5	4.6	5.5	180	180	150	150	192	18.0	
			-2.5	5.5	4.2	5.8	180	180	150	150	197	19.1	
			-2.5	5.5	4.2	5.8	180	180	150	150	198	19.1	
			-2.5	5.5	4.2	5.8	180	180	150	149	198	19.1	19.1
B-5	1500	1200	-2.5	5.5	5.1	4.9	180	180	157	156	192.5	16.1	
			-2.5	5.5	5.0	5.0	181	181	150	150	189	16.4	
			-2.5	5.5	4.9	5.1	181	181	150	150	190	16.72	
			-2.5	5.5	4.8	5.1	181	181	150	150	190	16.72	16.72

d' SCALE ZERO AT -8.0

h' SCALE ZERO AT 10.0

TABLE VIII

4" G.S. ENGINE

C CONDITION - CRANKSHAFT AND IDLER

T_1 = 180°F T_4 = 150°F

2 MARCH 1951

RUN	RPM	S	h'	h	T_4	T_6	T_7	MEP	FINAL MEP	
C-4	1200	960	7.15	2.85	152	149	169	9.35		
			7.15	2.85	152	150	169	9.35		
			7.15	2.85	150	149	169	9.35	9.35	
C-5	1500	1200	7.00	3.00	150	148	178	9.85		
			6.95	3.05	151	150	178	10.00		
			7.00	3.00	150	149	179	9.85	9.85	
C-6	1800	1440	7.00	3.00	152	152	181	9.85		
			7.00	3.00	152	152	191	9.85		
			7.00	3.00	150	150	191	9.85	9.85	
C-1	300	240	8.15	1.85	150	146	132	6.06		
			8.15	1.85	150	146	132	6.06	6.06	
C-2	600	480	7.40	2.60	150	146	142	8.54		
			7.40	2.60	152	145	142	8.54		
			7.40	2.60	152	146	142	8.54	8.54	
C-3	900	720	7.10	2.90	150	146	154	9.52		
			7.20	2.80	150	146	155.5	9.20	9.52	
C-7	2100	1680	6.85	3.15	148	148	200.5	10.32		
			6.85	3.15	150	148	200.5	10.32		
			6.85	3.15	150	150	200.5	10.32	10.32	
								3 MARCH 1951		
C-5	1500	1200	7.00	3.00	149	148	176	9.85		
			7.00	3.00	150	149	176.5	9.85		
			7.05	2.95	150	149	176.5	9.70	9.85	CHECKS
C-7	2100	1680	7.00	3.00	150	149	198	9.85		
			7.00	3.00	150	149	198	9.85	9.85	CHECKS

h' SCALE ZERO AT 10.0

TABLE IX

6 " G. E. ENGINE

A CONDITION - COMPLETE ENGINE

T_1 = 180°F T_4 = 150°F

20 APRIL 1951

RUN	RPM	S	d	h'	h	T_1	T_2	T_4	T_6	T_7	MEP	FINAL MEP
A-2	400	480	6.3	5.10	4.90	181	181	149	150	156	19.10	
			6.3	5.20	4.80	181	181	149	151	156	18.75	18.75
A-3'	700	840	6.3	4.60	5.40	180	180	150	153	172	21.00	
			6.3	4.60	5.40	180	180	150	152	173	21.00	
			6.3	4.60	5.40	180	180	150	152	173	21.00	21.00
A-5	1000	1200	6.3	4.00	6.00	180	180	149	150	192	23.40	
			6.3	4.00	6.00	180	180	149	150	192	23.40	
			6.3	4.00	6.00	180	180	149	150	193	23.40	23.40
A-6'	1300	1560	6.3	3.20	6.80	180	180	150	151	207	26.50	
			6.3	3.40	6.60	180	180	150	151	210	25.70	
			6.3	3.40	6.60	180	180	150	151	211	25.70	25.70
A-7	1400	1680	6.3	3.10	6.90	180	180	151	151	215	26.80	
			6.3	3.00	7.00	180	180	152	152	215	27.20	
			6.3	3.10	6.90	180	180	154	154	215	26.80	26.80
							1 MAY 1951					
A-1	200	240	6.3	5.60	4.40	180	180	165	165	126	17.10	
			6.3	5.60	4.40	182	182	150	150	126	17.10	
			6.3	5.60	4.40	181	181	150	150	127	17.10	17.10

NOTE: A-3' ENGINE HUNTED AT 600 RPM

A-6' ENGINE HUNTED AT 1200 RPM

h' SCALE ZERO AT 10.0

TABLE I

6" G.S. ENGINE

B CONDITION - CRANKSHAFT, ROD, AND PISTON

T_1 = 180°F T_4 = 150°F

6 APRIL 1951

RUN	RPM	S	d	h'	h	T_1	T_2	T_4	T_6	T_7	MEP	FINAL MEP
B-3	600	720	6.3	6.50	3.50	180	180	150	152	178	13.6	
			6.3	6.60	3.40	182	182	150	152	177	13.22	
			6.3	6.50	3.50	180	180	150	152	177	13.6	
			6.3	6.50	3.50	180	180	149	151	182	13.6	13.6
B-4	800	960	6.3	6.15	3.85	178	178	148	148	187	15.0	
			6.3	6.40	3.60	182	182	153	154	187	14.0	
			6.3	6.40	3.60	182	182	150	150	187	14.0	14.0
B-5	1000	1200	6.2	6.10	3.90	180	180	150	150	198	15.18	
			6.3	6.10	3.90	180	180	150	151	198	15.18	
			6.3	6.10	3.80	180	180	150	152	198	15.18	15.18
B-6	1200	1440	6.3	5.70	4.30	180	180	150	151	208	16.7	
			6.3	5.70	4.30	180	180	150	151	208	16.7	16.7
B-3	600	720	6.3	6.80	3.20	175	175	150	153	180	12.45	
			6.3	6.75	3.25	180	180	150	153	178	12.65	12.66
B-2	400	480	6.3	7.10	2.90	180	180	149	151	168	11.3	
			6.3	7.10	2.90	180	180	151	152	167	11.3	
			6.3	7.10	2.90	180	180	150	151	167	11.3	11.3
B-1	200	240	6.2	7.70	2.30	182	182	150	153	158	8.95	
			6.3	7.60	2.40	182	182	150	153	152	9.32	
			6.3	7.50	2.50	180	180	150	152	151	9.72	
			6.3	7.60	2.50	180	180	150	152	149	9.72	9.72

h' SCALE ZERO AT 10.0

TABLE XI

6" G.S. ENGINE

C CONDITION – CRANKSHAFT AND IDLER

$T_1 = 180°F$ $T_4 = 150°F$

21 MARCH 1951

RUN	RPM	S	h'	h	T_4	T_c	T_7	MEP	FINAL MEP
C-1	200	240	7.85	2.15	150	150	145	8.35	
			7.85	2.15	152	152	146	8.35	
			7.90	2.10	152	152	146	8.16	
			7.90	2.10	151	152	146.5	8.16	
			7.90	2.10	152	151	147	8.16	8.16
								23 MARCH 1951	
C-2	400	480	7.50	2.50	150	150	159	9.72	
			7.50	2.60	150	150	159	9.72	9.72
C-3'	700	840	7.20	2.80	151	151	172	10.90	
			7.20	2.80	151	151	172	10.90	
			7.20	2.80	150	150	172	10.90	10.90
C-4	800	960	7.10	2.90	150	150	177	11.29	
			7.10	2.90	150	150	177	11.29	
			7.10	2.90	150	150	177.5	11.29	11.29
C-5	1000	1200	6.95	3.05	150	150	187	11.77	
			6.95	3.05	150	150	187	11.77	11.77
C-6'	1300	1560	6.65	3.35	150	150	201	13.00	
			6.65	3.35	150	150	201	13.00	13.00
C-7	1400	1680	6.60	3.40	150	150	207	13.20	
			6.60	3.40	150	150	206.5	13.20	13.20
C-2	400	480	7.50	2.50	150	150	159.5	9.72	CHECK
C-1	200	240	7.90	2.10	150	150	149	8.16	CHECK

NOTE: C-3' ENGINE HUNTED AT 600 RPM

C-6' ENGINE HUNTED AT 1200 RPM

h' SCALE ZERO AT 10.0

APPENDIX

APPENDIX "A"

U. S. ENGINES

Actual and Relative Sizes


Actual bore	2.000"	4.000"	6.000"	
Relative bore	1.000	1.600	2.400	
Stroke	3.000"	4.800"	7.200"	
Displacement Vol.	14.726 $in.^3$	60.318 $in.^3$	203.57 $in.^3$	
Connecting Rod Length	5.406"	8.650"	12.974"	
Crank radius				
Con. rod length	0.2775	0.2775	0.2775	
Piston speed	(0.5)(rpm)	(0.8)(rpm)	(1.2)(rpm)	ft/min.

APPENDIX F.1

Section 4.1, Problem

Natural End Reaction Beam

Support Span	4.000'	4.000'	4.000'
Beginning Load	2.000	2.000	2.00
Ending	2.000'	4.000'	2.000'
Cantilevered Tot.	14.750 in.^2	28.124 in.^2	80.24 in.^2
Concentrated Dead Loading	2.500'	4.000'	11.125'
Shear Factor			
Tot. End Shear	4.5273	8.8172	9.4273
Section Stress	(0.0)(psi)	(0.0)(psi)	(Satisfies Criteria

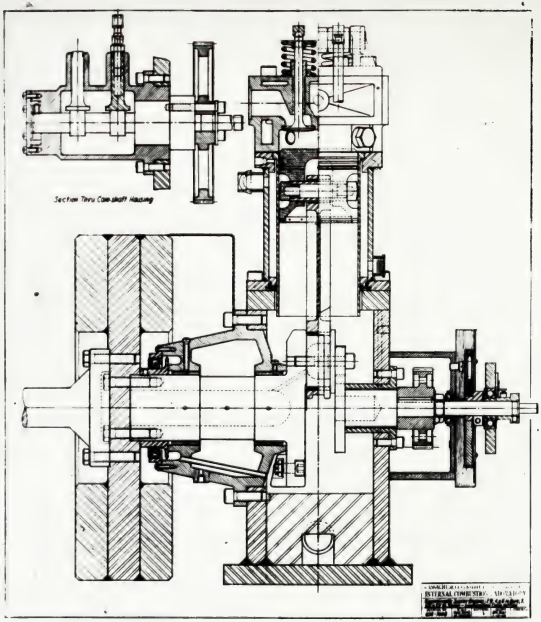



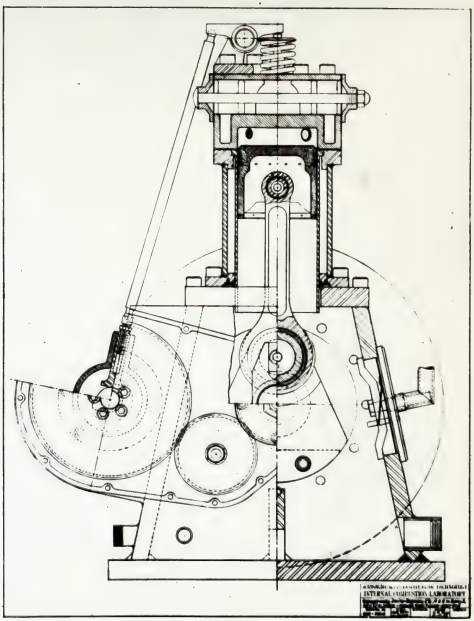



FIG. A-1

"A" CONDITION OF ASSEMBLY

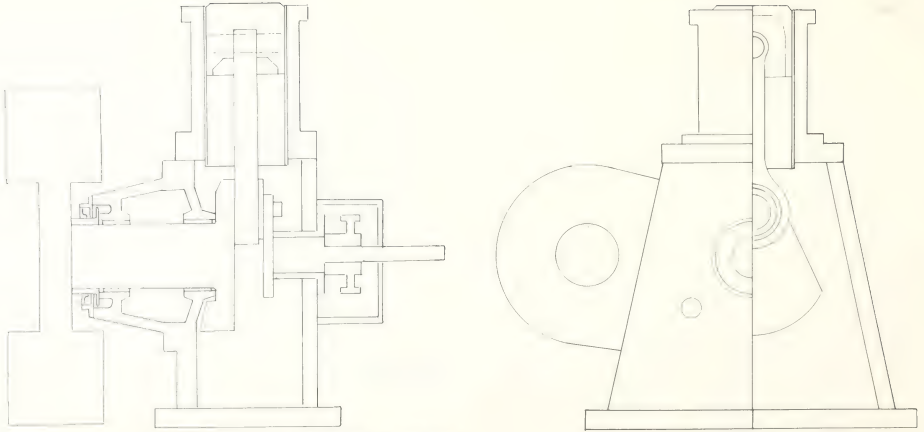


"B" CONDITION OF ASSEMBLY
FIG. A-2

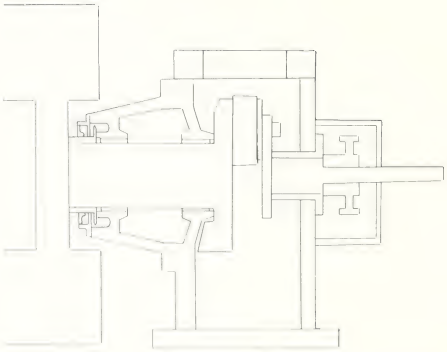

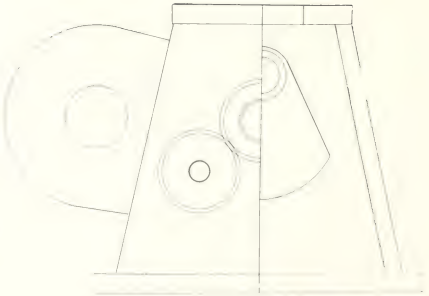

"C" CONDITION OF ASSEMBLY

FIG. A-3

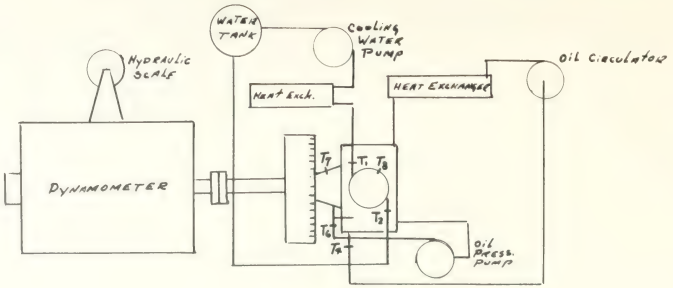

SCHEMATIC DIAGRAM
GEOMETRICALLY
SIMILAR ENGINES
FIG. A-4

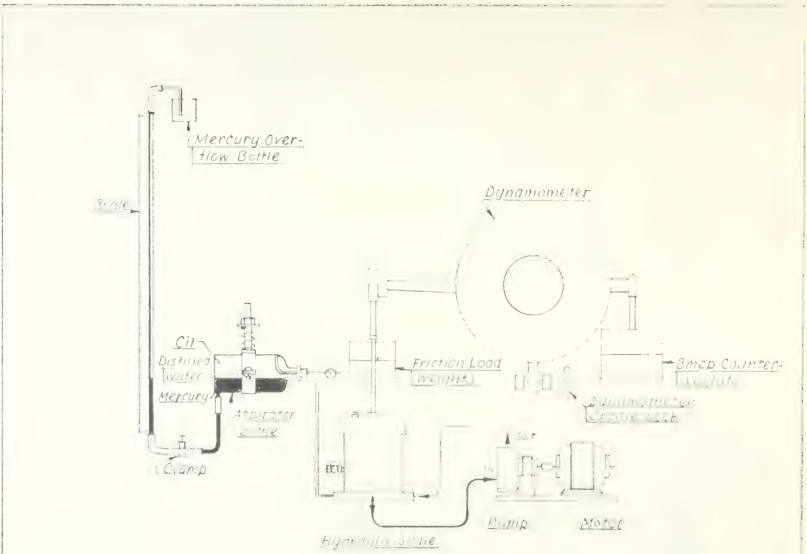


FIG. A-V
Schematic Diagram of Hydraulic Scale Installation

APPENDIX "B"

FRICTION THEORY FOR GEOMETRICALLY SIMILAR ENGINES [7]

1.) Viscous Friction

Using Petroff's Derivation for thick Film Lubrication:

$$FMP = k \frac{D}{d} \frac{l}{d} \mu l^2 N^2$$

In a Geometrically Similar System

$\frac{D}{d}$ = Constant

$\frac{l}{d}$ = Constant

$\therefore$ $FMP \sim \mu l^2 N^2$

$FMP \sim FMEP \; V_d N \sim FMEP \; l^2 \; N$

$\therefore$ $FMEP \sim \frac{\mu}{l} N$

At the same piston speed

$FMEP \sim \frac{\mu}{l}$

2.) Coulomb Friction

$$FMEP \sim f \frac{(\text{Load Pressure}) \; l^2 \cdot l}{V_d} \sim f \; (\text{Load Pressure})$$

The friction factor depends on surface finish and materials which should be the same in similar engines. Also in similar engines FMEP (or Load Pressure) is the same at same piston speed. Therefore, for similar engines operating at the same piston speed the Coulomb FMEP should be the same.

Similarity Laws

Similarity Theory and Dimensional Analysis

[1]

Buckingham's Theorem

If the same relation does obtain but exactly in the same manner between corresponding quantities in similar systems, then the systems are said to be similar. Therefore, for similar systems the same dimensionless groups must be equal.

The Principle Impulse Impulse on surface Fluid and momentum change

$$\text{Impulse} = \int_{t_1}^{t_2} F\,dt = \text{Change in momentum}$$

Dynamic Similitude

$$\text{Impulse} \sim \frac{F}{W}$$

$V \propto$ the same pipeline speed

$$V \sim \sqrt{\frac{F}{W}} \propto$$

$$\text{Impulse} \sim \text{Impulse } t_2 \sim \text{Impulse } t_2 \propto$$

$$V \sim \text{Impulse } t_2 \propto$$

$$\frac{D}{F} = \text{Constant}$$

$$\frac{D}{V} = \text{Constant}$$

In a Geometrically Similar System

$$\text{Impulse} = \frac{D}{V} \propto \frac{D}{V}$$

Buckingham's Demonstration the Basis of Dimensional

APPENDIX C

LUBRICANTS

In order to meet the similitude requirement that μ/ρ be the same for G.I. Engines, the viscosity of the oil used in each engine was adjusted by blending SAE 20 and SAE 60 lubricants in the proper quantities. The oils used had the properties listed in the following table.(1)

	Viscosity S.S.U.			
Engine	100°F.	150°F.	210°F.	Gravity
2½"	349	160.3	52.8	.88
4"	828	339.0	76.2	.89
6"	1665	627.0	114.1	.90

Composition:

2½"	URSA P 20 (Texaco symbol)
4"	34% URSA P 60, 66% P 20 (by volume)
6"	95% URSA P 60, 5% P 20 " "

These oils are a straight mineral oil, wholly paraffin base, distilled, with no additives. The above samples give the same value of μ/ρ at 230°F. This temperature was adopted in Ref. 1 as an attempt to satisfy similitude requirements in all parts of the engine.

Chapter 6

Conclusions

In order to meet the criteria mentioned above Al_2O_3 be the case

The oils used for the experiments listed in the following table[1]

Factors in creation and the oil for the Determination in the Bubble Pressure.

the CO_2 Concentration, the viscosity of the oil must be very high molecular wei-

ght oil additives. The viscosities also the same value at_{20}° of CO_2.

These oils are a viscosity mineral oil, small paraffin base, distilled

maintenance in all parts of the engine.

Designation	$100.C_{\bullet}$	$210.C_{\bullet}$	$SAE.C_{\bullet}$	Density
$S_{\bullet}$	240	160.3	30.8	.88
$M_{\bullet}$	838	339.0	76.3	.89
$C_{\bullet}$	7650	6842.0	117.7	.90

Viscosity Factor

$S_{\bullet}$	240 (Pennsylvania)
$M_{\bullet}$	1240 (Pennsylvania)
$C_{\bullet}$	7650 (Pennsylvania)

APPENDIX "D"

WATER FLOW MEASUREMENTS

The water flows were measured by means of ASME square edged orifices inserted in the line between the engine outlet and the water expansion tanks. The flow was controlled by a throttle valve inserted on the discharge side of the water pumps.

Each orifice was calibrated and the results plotted in Figs. D-1, D-2, and D-3.

The flow rates actually used were:

2½"	4"	6"
0.15$^{\#}$/sec.	0.334$^{\#}$/sec.	0.864$^{\#}$/sec.

These flows were based on 0.024$^{\#}$/sec./in^{2} for all engines.

Problem 14.

Rate law determination

Some iron(III) oxide (Fe_2O_3) is ore mixture.


[X]	[Y]	Rate
0.12	0.10	0.30

Use the data provided to answer the following questions.

Determine the rate law for the reaction.

Explain your reasoning. Use data to support your answer.

Determine the value and units of the rate constant, k.

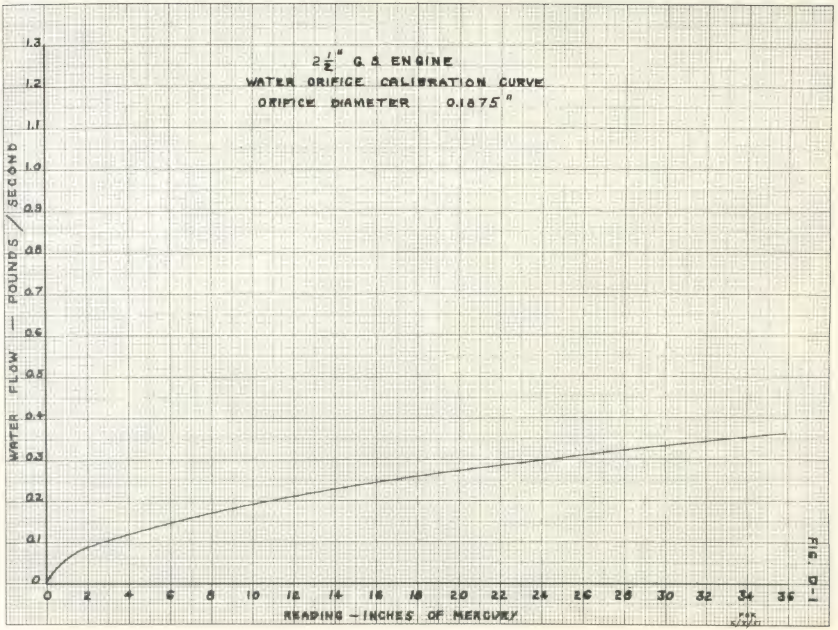
2 1/2" G.S. ENGINE
WATER ORIFICE CALIBRATION CURVE
ORIFICE DIAMETER 0.1875"
WATER FLOW — POUNDS / SECOND
1.3
1.2
1.1
1.0
0.9
0.8
0.7
0.6
0.5
0.4
0.3
0.2
0.1
0
0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30 32 34 36
READING — INCHES OF MERCURY
FIG. 1

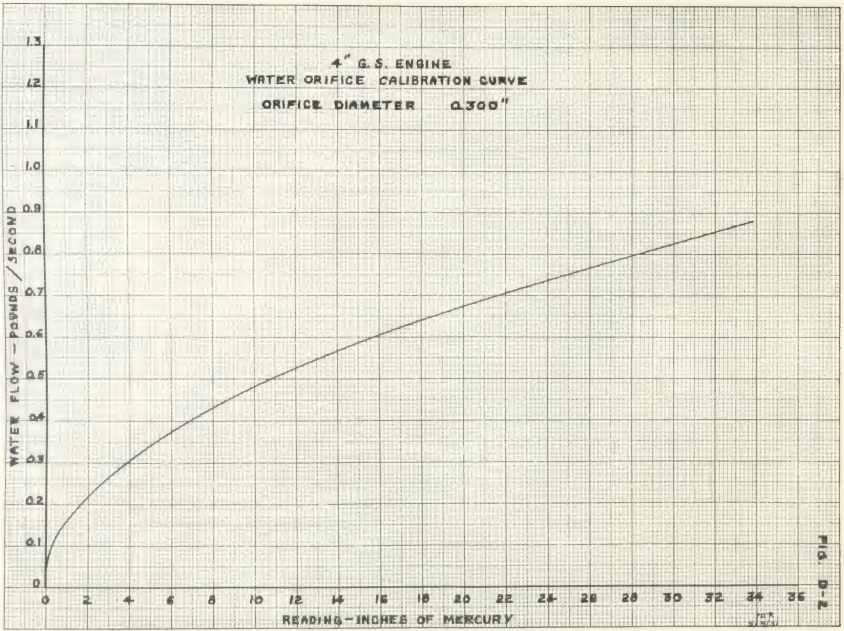

4" G.S. ENGINE
WATER ORIFICE CALIBRATION CURVE
ORIFICE DIAMETER 0.300"
WATER FLOW - POUNDS / SECOND
1.3
1.2
1.1
1.0
0.9
0.8
0.7
0.6
0.5
0.4
0.3
0.2
0.1
0
0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30 32 34 36
READING - INCHES OF MERCURY

FIG. D-2

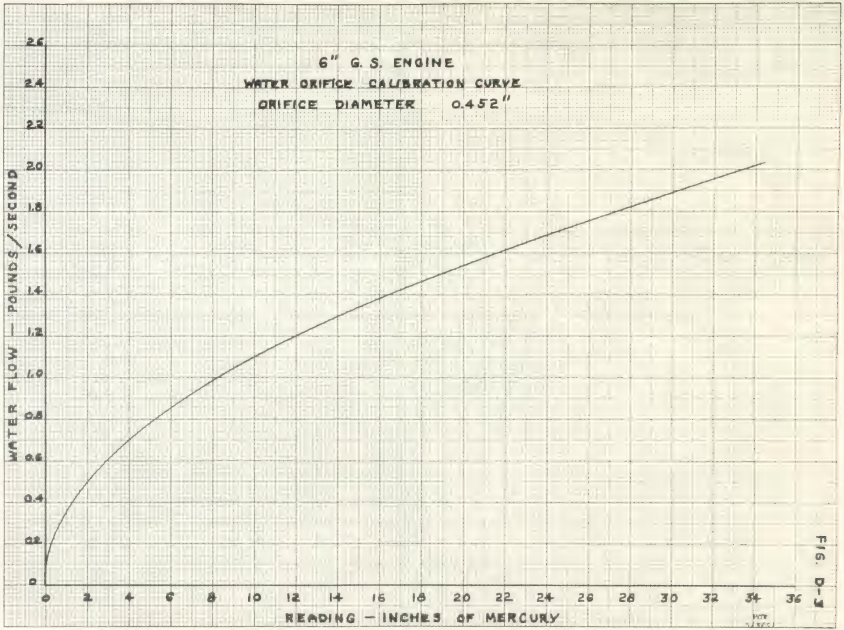

6" G. S. ENGINE
WATER ORIFICE CALIBRATION CURVE
ORIFICE DIAMETER 0.452"
WATER FLOW — POUNDS / SECOND
0
0.2
0.4
0.6
0.8
1.0
1.2
1.4
1.6
1.8
2.0
2.2
2.4
2.6
0
2
4
6
8
10
12
14
16
18
20
22
24
26
28
30
32
34
36
READING — INCHES OF MERCURY

FIG. D-3

APPENDIX "B"

MEASURED DIMENSIONS, S.A.E. ENGINES

Engine	2½"	4" *	6"	Remarks
Main Bearing (Crankside)	2.1155"	3.5898"	5.0850"	New bronze bearings
Crankshaft	2.1170"	3.5935"	5.0790"	on 2½" engine
Clearance	.0025"	0.0048"	0.0060"	
Clearance/Bore	0.0010	0.0012	0.0010	
Main Bearing (Flywheel)	2.1155"	Not observed	5.085"	New bronze bearing
Crankshaft	2.1170"	"	5.079"	On 2½" engine
Clearance	0.0025"	"	0.006"	
Clearance/Bore	0.0010	"	0.0010	
Conrod Bearing (Large end)	1.6291"	2.614"	3.904"	New bronze covered
Crankpin Journal	1.6268"	2.613"	3.899" **	bearing on 2½"
Clearance	0.0023"	0.004"	0.005"	engine
Clearance/Bore	0.00092	0.002	0.000833	
Camshaft Bearing (Gear end)	Not observed	Not observed	3.375"	
Journal	"	"	3.371"	
Clearance	"	"	0.004"	
Clearance/Bore			0.00066	
Camshaft Bearing (Flywheel end)	Not observed	Not observed	1.500"	
Journal	" "	" "	1.498"	
Clearance	" "	" "	0.002"	
Clearance/Bore			0.00033	

* Data in this column not observed by authors but supplied from records of Prof. W. A. Leary of Sloan Laboratory.

** Laboratory records show this dimension to be 3.8982" which would make Clearance/Bore 0.00097

Appendix [illegible]

[illegible] Dimensions, Inches, Decimals

Item	[illegible]	[illegible]*	[illegible]	Bearing
[illegible]	[illegible]	3.2488"	3.2500"	[illegible]
[illegible]	2.7170"	3.2520"	3.0780"	on 2½" engine
[illegible]	.0052"	0.0048"	0.0020"	
[illegible]/Inch	0.0030	0.0075	0.0010	
[illegible] (Diameter)	2.7170"	Not observed	3.0825"	New bronze bearing
[illegible]	2.7170"	"	3.0780"	On 2½" engine
[illegible]	0.0042"	"	0.0050"	
[illegible]/Inch	0.0030	"	0.0010	
Rocker bearing (Inner end)	1.0291"	1.0314"	1.0304"	New bronze bushed
[illegible] Journal	1.0288"	1.0310"	1.0299"	bearing on 2½"
[illegible]	0.0003"	0.0004"	0.0005"	engine
[illegible]/Inch	0.0003	0.0004	0.0005	
Camshaft bearing (Inner end)	Not observed	Not observed	1.3778"	
Journal	"	"	1.3774"	
Clearance	"	"	0.0004"	
[illegible]/Inch			0.0003	
Camshaft bearing (Fly-wheel end)	Not observed	Not observed	1.3500"	
Journal	"	"	1.3494"	
Clearance			0.0006"	
[illegible]/Inch			0.0004	

* Data in this column may observed by anyone but qualified from research of Prof. F. V. Darcy of Olson Laboratory.

** Laboratory records show this dimension to be 3.2500" which would make [illegible]/Inch 0.0007

MEASURED FIGURES FOR RADIAL T. RING

Engine	2½"	4"	6"
Top Compression Ring	930 Gms	2725 Gms	4535 Gms
Tension/Bore^2	148.9	170.0	127.0
Lower Compression Ring	970 Gms	2700 Gms	5675 Gms
Tension/Bore^2	147.0	168	158
Oil Ring	1325 Gms	2900 Gms	7575 Gms
Tension/Bore^2	215.0	185.0	216.0

APPENDIX "F"

BIBLIOGRAPHY

1. W. G. Asbury, G. F. Beyer, P. L. Breeden, J. R. Belanci and R. Wiggins. "A Study of Friction and Detonation in Geometrically Similar Engines." MIT Thesis 1950.

2. E. Breed and J. R. Dowdrey. "A Study of the Laws of Similitude Using the Six Inch G. S. E." MIT Thesis 1949.

3. L. W. Lobdell and R. E. Clark. "A Study of the Principle of Similitude Using the Four Inch G. S. E." MIT Thesis 1949.

4. F. G. Mikel and D. W. McElwiney. "A Study of the Laws of Similitude Using the 2½" G. S. E." MIT Thesis 1949.

5. C. F. Taylor - "The Effect of Size on the Design and Performance of Internal Combustion Engines." ASME Paper 49-A-116 presented Nov. 27-Dec. 2, 1949 meeting.

6. C. F. Taylor and E. S. Taylor - "Internal Combustion Engine." Revised Edition 1948, International Textbook Company.

7. R. A. Leary and J. V. Jovellanos. "A Study of Piston and Ring Friction." NACA ARR 4J06 (Unclassified). - Nov. 1944.

Chapter Two

Bibliography

Bear, Jay Alan. [Unpublished] --Year 1947.

1. Mr. Y. Jerry and I. Y. Josephson. "A Study of Taylor and Bear Theories", Chapter Four, International Textbook Company.

2. I. C. Taylor and S. B. Taylor - Journal Composition Series, Journal Composition Monograph, Year 1947, Taylor and Bear Corporation Monograph.

3. I. B. Taylor - "The Effect of Time on the Taylor and Performance of Internal Combustion Engines", 1910 Thesis 1910.

4. I. C. Bear and S. B. Taylor. "A Study of the Laws of Gasoline Engine Performance", 1912 Thesis 1912.

5. I. C. Taylor and I. Y. Josephson. "A Study of the Theories of Gasoline Engine Performance", 1914 Thesis 1914.

6. I. C. Bear and I. Y. Josephson. "A Study of the Laws of Gasoline Engine Performance", 1914 Thesis 1914.

7. I. C. Taylor and I. Y. Josephson. "A Study of the Theories of Gasoline Engine Performance", 1914 Thesis 1914.

8. I. C. Taylor and I. Y. Josephson. "A Study of the Laws of Gasoline Engine Performance", 1914 Thesis 1914.

9. I. C. Taylor and I. Y. Josephson. "A Study of the Laws of Gasoline Engine Performance", 1914 Thesis 1914.

10. I. C. Taylor and I. Y. Josephson. "A Study of the Laws of Gasoline Engine Performance", 1914 Thesis 1914.

APR 2
JUL 16
MR 29 62

BINDERY
RECAT
10436

15597

Thesis Aroner
A73 An investigation of friction in M.I.T. four-stroke geometrically similar engines.

JUL 16
MR 29 62

BINDERY
RECAT
10436

T
A

15597

Thesis Aroner
A73 An investigation of friction in M.I.T. four-stroke geometrically similar engines.

thesA73
An investigation of friction in M.I.T. f
3 2768 002 01264 3
DUDLEY KNOX LIBRARY